


# OMRAN TAHVIEH

Heating , Ventilation And Air Conditioning



[www.omrantahvieh.com](http://www.omrantahvieh.com)  
[info@omrantahvieh.com](mailto:info@omrantahvieh.com)





# OMRAN

# TAHVIEH

Heating , Ventilation And Air Conditioning

OMRAN as a leading company for good required air conditioning, ventilation and heating technology has been projecting and manufacturing a wide range of units.

Most of the products are produced by the use of modern technology production. OMRAN company arises from the experience matured by a group of specialists in air conditioning market in over many years of activity. Our company has many times faced, studied and solved all the aspects related to the manufacturing of air conditioning units for air movement and treatment with taking care of using first quality materials and technically correct and economically competitive sizing of the units.

OMRAN'S technical department is at your disposal to find the best solution for each application out of the standard available.

OMRAN'S constant developments ensure the highest standards of quality ; the declared performances are certified by tests carried in by independent in statues.



## Contents

Liquid Chiller (nOWLC and nOALC Series)	1
Air Cooled Chillers	2
Modular Packaged Air Conditioners	3
OIMT Cooling Towers	4
Hygienic Air Handling Unit	5
Air Handling Unit	6-7
OTC Series ( 400-1600 TR )	8
OMB F.R.P Cooling Tower	9
OFCC Cooling Towers	10
OFCB Series (10 - 1200 TR)	11
OCC Series ( 15-300 TR)	12
Series V Closed Circuit Cooling Tower	13
Series O10 - Series O15	14
Series Cubic Tower	15
OFCB-IND-DZ Dust Proof Cooling Towers	16
Plate Heat Exchanger	17
Unit Heater (Hot Water & Steam)	18
OMSN F.R.P Cooling Tower	19
OACC Air Cooled Condenser	20
Packaged Industrial Cooler	21
ZENT (OZ Series)	22
Packaged Industrial Cooler-Heater(Indirect Fire)	23
Packaged Semi-Industrial Cooler / Air Washer Cleaner Cooler	24
OACF Centrifugal Air Cooled Condenser	25
OADF Direct Drive Dry Type Fluid Coolers	26
Air Curtain (OR4 Series)	27
OVTL - Open Cooling Tower (Low Profile)	28
Classic Fan Coils	29
Ducted Fan Coils	30
Luxury Exposed Fan Coils	31
Patents	32

*Lovely Weather For Ever*



# OMRAN

TAHVIEH



# Liquid Chiller (nOWLC and nOALC Series)

## Features and Benefits

OMRAN cold generator reciprocating Liquid chiller are designed and built to provide reliable, efficient performance and easy serviceability. Complete factory run testing helps ensure every OMRAN chillers starts easily and operates reliable. The compressor alone undergoes a continuous series of demanding production checks such as proof and leak test and static electrical and multiple leak - back checks. These are Followed by several run tests to confirm proper operation of the chiller. OMRAN 10 through 240 ton cold generator chillers are designed with service personal in mind. Compressor are standardized and assembled for easy access. OMRAN chillers use, exclusively Carrier and Copeland high efficiency semi - hermetic components, heaving high technology design. OMRAN chillers are equipped with multiple compressor connected in parallel in order to achieve greater operating flexibility. By cycling individual compressors the system capacity can be with full power saving for the compressors in operation by using the system of parallel compressors operation



uncomplicated unload start is achieved by a simple time delay starting of single compressors as opposed to a compressor start with the total capacity.

## Capacity Ratings - Water Cooled Chillers

Evaporator leaving chilled water temperature = 45 ° F																		
Unit Size	Condenser Entering water temp.(° F), Condenser temp. Rise 10° F																	
	75						85						95					
	C.Cap		Ch.W		Condm		C.Cap		Ch.W		Cond.W		C.Cap		Ch.W		Cond.W	
	TR	PI	Gpm	PD	Gpm	PD	TR	PI	Gpm	PD	Gpm	PD	TR	Pi	Gpm	PD	Gpm	PD
10WLC-10	10.3	7.5	25.3	3.1	28.7	6.2	9.6	7.8	22.8	2.8	27.9	5.9	8.8	8.4	21.3	2.5	26.7	5.6
10WLC-15	13.6	9.6	3.4	3.7	38.4	5.5	12.8	10.5	31.2	3.4	38.1	5.2	11.8	11.2	28.6	2.3	38.0	4.6
10WLC-20	16.4	11.1	39.5	3.7	48.8	6.5	15.5	12.1	37.0	3.2	45.0	6.0	14.6	13.0	35.0	2.6	44.0	5.6
10WLC-25	21.0	14.0	50.1	4.4	58.3	10.1	19.4	15.9	46.6	3.8	56.1	9.4	18.4	16.7	44.5	3.1	55.0	8.8
10WLC-30	24.2	17.3	58.8	6.2	70.3	7.8	24.1	18.8	55.5	5.5	68.0	7.1	22.0	20.8	53.2	4.8	65.5	6.2
10WLC-35	31.0	21.6	73.0	10.8	88.8	5.6	29.0	23.3	70.1	8.9	85.0	5.5	27.3	26.0	64.4	7.5	82.0	5.0
10WLC-40	35.1	25.7	84.8	6.6	103.4	5.7	33.0	28.0	78.8	5.7	97.0	5.2	31.0	30.4	74.0	5.1	93.2	4.8
10WLC-50	44.2	29.8	107.7	10.8	130.0	7.9	42.1	32.9	102.6	10.1	126.3	6.9	40.0	36.0	94.7	9.6	115.0	6.2
10WLC-60	54.0	36.6	130.1	9.3	150.0	9.7	50.1	40.8	120.3	8.9	148.1	9.3	46.3	44.0	110.0	7.2	143.1	8.1
20WLC-30	27.2	19.1	64.7	6.8	77.3	5.6	25.6	10.6	60.9	6.1	76.6	5.2	24.0	23.0	57.3	5.4	72.0	4.8
20WLC-40	32.7	22.0	78.2	6.9	92.3	6.3	31.0	24.0	73.4	5.9	90.0	6.0	29.1	25.9	70.0	5.0	87.2	5.8
20WLC-50	40.9	27.9	98.1	9.3	118.9	10.0	38.8	30.6	92.4	8.8	114.0	9.4	36.3	33.4	88.0	8.2	110.0	8.8
20WLC-60	49.5	34.6	118.2	14.4	140.5	7.7	46.4	37.6	110.9	12.9	136.5	7.2	43.4	40.0	104.0	11.7	130.0	6.8
20WLC-70	61.0	43.3	148.2	18.8	176.2	5.6	57.9	47.2	138.4	18.4	170.2	5.5	53.7	51.8	130.5	18.4	165.0	5.5
20WLC-80	68.5	51.6	166.3	17.6	199.5	5.3	64.5	55.7	155.6	17.3	190.0	4.9	60.8	60.5	150.4	16.9	185.2	4.5
20WLC-100	87.9	59.7	212.2	16.2	255.1	7.9	84.4	65.3	202.2	14.9	250.0	6.7	78.2	77.9	188.7	13.4	240.0	6.7
20WLC-120	106.2	72.9	258.3	15.9	306.9	9.7	100.0	80.1	249.1	14.1	300.0	9.3	91.4	88.0	220.2	12.9	285.5	8.5
30WLC-60	49.0	32.9	118.8	13.8	138.2	6.4	46.4	35.9	110.0	12.4	134.4	6.0	43.6	38.8	104.2	10.7	130.0	5.6
30WLC-75	61.0	41.8	150.1	18.5	172.3	10.0	57.8	46.0	140.0	16.3	168.1	9.4	54.4	50.0	130.0	14.6	160.0	8.8
30WLC-90	73.2	51.6	175.0	15.6	207.4	7.5	78.0	55.8	165.5	13.5	200.5	7.0	65.6	60.0	156.0	12.2	195.5	6.8
30WLC-105	91.3	64.8	220.0	15.4	260.0	5.5	85.0	70.2	206.7	13.8	250.0	5.5	80.3	77.5	192.0	12.4	240.0	5.5
30WLC-120	102.7	76.2	250.0	19.2	290.0	5.4	95.9	83.0	230.6	17.6	280.0	4.9	89.2	90.0	215.0	15.5	270.0	4.5
30WLC-150	131.5	90.0	315.2	20	380.0	7.9	125.3	97.9	300.0	18.8	370.0	7.0	116.3	108.5	280.0	16.1	360.0	6.3
30WLC-180	158.0	109.0	380.0	20.5	450.0	9.8	148.5	120.2	360.0	19.0	440.0	9.3	138.0	131.4	330.0	16.0	430.2	8.2
40WLC-80	66.0	43.8	158.0	16.7	183.4	5.3	61.5	47.3	150.0	15.2	175.0	4.8	58.0	51.5	138.8	13.6	170.0	4.7
40WLC-100	82.4	55.8	200.0	9.7	235.0	7.7	77.7	60.6	190.0	9.0	225.5	6.9	73.0	66.4	175.0	7.6	220.0	6.8
40WLC-120	98.2	68.6	235.0	10.5	280.0	9.5	93.0	75.0	225.0	9.5	260.0	9.4	86.8	80.5	210.0	8.4	260.5	8.9
40WLC-140	121.5	85.8	299.0	19.0	350.0	6.9	114.0	96.0	270.4	17.8	335.0	6.5	107.2	104.0	260.0	17.0	325.0	6.5
40WLC-160	136.4	101.8	330.0	17.4	390.5	8.8	128.9	110.5	305.5	15.5	380.0	7.7	119.8	120.1	290.0	13.9	356.0	7.4
40WLC-200	174.5	119.5	418.9	17.6	500.6	10.8	167.4	130.4	400.0	16.5	490.0	10.5	156.4	144.2	370.0	13.5	470.0	9.5
40WLC-240	210.4	144.3	506.2	19.3	600.0	11.5	197.0	160.6	470.0	17.8	590.0	10.9	182.5	175.0	440.0	14.5	565.5	9.6

Rating Table Based on chilled and condenser water temp. Changed (Δt) 10 ° F (5.5°C).

Subject To Modification without notice



### Air Cooled Chillers



OMRAN TAHVIEH



1, 2, 3 & 4 Basic (Series)	5, 6 & 7 Nominal Cooling Capacity (Tons)	8 Electrical Supply (V - Ph - Hz)	9 Compressor Type	10 Condenser Coil	11 Controls	12 Accessories	13 Options
OLAC	010	H: 208/230 - 3 - 60	H: Semi-Hermetic	A: Aluminum Fin	A: Standard	A: Standard*	A: Standard*
CLASSIC	015	M: 380 - 3 - 60	Reciprocating	B: Coated	B: Microprocessor	B: Water Flow Switch	B: Compressor Circuit Breaker
AIR COOLED	025	(4 WIRE)	S: Screw	Aluminum Fin		C: Spring Isolators	
WATER	030	F: 460 - 3 - 60		C: Copper Fin		D: Hot Gas Bypass	
CHILLERS	035	L: 380/415 - 3 - 50				E: B + C	
	040	(4 WIRE)				F: B + D	
	050					G: C + D	
	060					H: B + C ÷ D	
	070						
	080						
	100						
	120						
	140						
	160						
	180						
	200						
	220						
	240						

### FEATURES

\*These OALC air cooled water chillers offer The ultimate combination of Energy saving design, superior engineering features and flexibility of application as required by today's market.

\*These chillers incorporate the newest advanced controller. This controller monitors analog and digital inputs to achieve precise control & protective functions of the air Cooled water chiller units. This microprocessor controller is complete with all the hardware and software necessary to control the Chiller unit and Insures its efficiency and reliability.

\*Compact unit design and excellent serviceability.

\*All Packaged chillers incorporate compact water coolers with low fin copper tubes and expanded into a steel tubular sheet which offer officiant water flow as well as heat transfer design resulting in optimal unit performance.

\*All units incorporate separate sub cooler circuit which is integral to the condenser surface. This additional subcooling circuit provides superior system Performance.

\*High energy Efficiency ratio (EER) semi - hermetic reciprocating compressors provided in these units.

\*Single point power connection to minimize job site installation cost and time.

\*Completely Wired control panel provides all the necessary operating and safety controls.

\*All compressors are with independent refrigeration circuits.

\*Compressors are either with part winding or across - the - line start depending on the models.

\*Low noise condenser fans, direct drive.

\*All fans are propeller type, top discharge, provided with protective grille mounted on top panel within the unit casing.

\*All condenser fan motors are totally enclosed air over type (TEAO) with class "F" Winding insulation and bear - ings.



# Modular Packaged Air Conditioners



## A. GENERAL

The modular packaged unit is a factory assembled cooling or combination heating and cooling single zone unit suitable for mounting on the roof or ground. The packaged unit consists of refrigerant compressors, cooling coil, heating coil (optional), condenser coil, fans, electric heater (optional), control wiring and inter connecting piping - all factory assembled. Unit casing is of rigid construction mounted on pressed steel rail base with lifting holes for overhead rigging. The unit is provided with an integral Weather resistant control panel suitable for remote thermostat control, ready for field Connection to utilities, roof curbs and ducts.

## B. UNIT ENCLOSURE

Unit sections are of modular construction with base frame and panels of heavy gaug galvanized steel. Top & bottom base pan, vertical posts, cross channels & supporting brackets joined together bolted. Steel sheet panels are zinc - coated and galvanized by the hot dip process.

## C. COMPRESSOR

Scroll compressors are used as standard for models OCPUA240,300, & 360 with an option to use semi-hermetic reciprocating compressors. Semi-hermetic reciprocating compressors are used for all other models. The compressors are equipped with internal motor protection and also provided with vibration isolators. Oil pressure control is provided on units with semi-hermetic compressors only.

## D. INSULATION

The air handling section is insulated with fiberglass, or polyroll or polyurethan insulation which will prevent condensation from forming on the casing. Insulation is protected against deterioration and erosion from air currents.

## E. EVAPORATOR / CONDENSER / HOT WATER COILS (OPTIONAL)

Coils are of the corrugated fin - and - tube type constructed of seamless copper tubes, mechanically bonded to Aluminum fins. As an option, Corrugated copper Or coated aluminum fins may be provided.

## F. AIR COOLED CONDENSING SECTIONS

1. Fans are propeller type, direct drive, upward discharge through tool

formed venturi, provided with protective Grilles mounted on top panel within the unit casing.

2. Motors are totally enclosed air - over type. Motors are firmly Fixed in motor mount.

3. Each compressor has separate condenser coil with safety controls. High, low oil pressure gauges, sight glass, filter drier, compressor Discharge/suction rotolock valve, discharge line muffler and vibration eliminator (for Semi hermetic compressors only) are standard on all models.

## G. EVAPORATOR SECTION

**DRAIN PAN:** Drain pan is provided under the cooling coil and shall incorporate Coupling connection on both ends.

**EVAPORATOR FANS:** Fans are of centrifugal type with forward curved blades capable of handling Total required air flow & static pressure in the published ranges. The choices of fan section configurations are top, bottom and front supply air arrangements to provide optimum installation flexibility. Fan drive is through adjustable pitch pulleys and V - belt drive. Blower motor is mounted on anti - vibration pads on adjustable base and secured by locking device.

## H. MIXING BOX

The standard mixing box has top, bottom or front return air arrangement with fresh air opening is always from the side of the unit. Two inch thick filter racks are provided as standard on all models. Large mixing box is available as an option for 100% side return air and economizer application. Additional accessories such as return and fresh air dampers and rain hood can be provided.


Model Number	OCPUA240	OCPUA300	OCPUA360	OCPUA420	OCPUA480	OCPUA600	OCPUA720	OCPUA840		
NOMINAL CAPACITY , TONS - Scroll / Semi hermetic	1	20.8/20.7	25.3/25	28.4/31.8	36	42.2	50	61.4	70.8	
NOMINAL CAPACITY , TONS - Scroll / Semi hermetic	2	19.2/18.8	23.2/22.6	26.2/29	32.7	38.4	45.5	56	65	
TOTAL UNIT POWER INPUT kW*-Scroll / Semi hermetic	1	26.8/27	31/33.9	29/42.1	49	58.4	66.7	87	101.9	
TOTAL UNIT POWER INPUT kW*-Scroll / Semi hermetic	2	31.8/32	36.8/39.1	34.4/48.1	55.8	67.4	75.6	100.3	115.4	
EER (ENERGY EFFICIENCY RATIO)-Scroll / Semi hermetic	1	9.3/9.2	9.8/8.8	11.7/9	8.8	8.6	8.9	8.4	8.9	
EER (ENERGY EFFICIENCY RATIO)-Scroll / Semi hermetic	2	7.2/7.1	7.5/6.9	9.1/7.2	7	6.8	7.2	6.7	6.8	
COMPRESSOR TYPE(stander)	Scroll		Scroll	Scroll	Semi-hermetic					
Oil per system O2	Scroll		223	-	-	-	-	-		
	Semi-hermetic		106	106	106	158	158	158	167	167
Refrigerant	R-22									
Charge per system (o2)	360	450	540	630	720	900	1080	1260		
CONDENSER FAN TYPE	Propeller									
Qty-Diameter (inch)	30	30	30	30	30	30	30	30		
Nominal CFM	13200	13200	19800	19800	26400	26400	33000	39600		
Motor HP -RPM	1.5-950	1.5-950	1.5-950	1.5-950	1.5-950	1.5-950	1.5-950	1.5-950		
CONDENSER COIL TYPE	Corrugated fin & tube									
Tube Dia - Rows	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8		
EVAPORATOR BLOWER TYPE	Centrifugal & V-Belt Drive									
Size(inch)	18*18	18*18	18*18	22*22	22*22	22*22	25*25	25*25		
Nominal CFM	7000	9000	10500	12000	14000	16000	19500	22000		
Motor HP Std./Alt	7.5/10	7.5/10	7.5/10/15	10/15	10/15/20	15/20/25	15/20/25	20/25		
Fan RPM range	700-1200	700-1200	700-1200	700-1200	700-1200	700-1200	700-1200	700-1200		
EVAPORATOR COIL TYPE	Corrugated fin & tube									
Tube Dia	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8		
Total face area (Sq.ft)	22	22	24	24	31.11	31.11	40	40		
HIGH PRESSURE SWITCH	Open (PSIG)	450+10	450+10	450+10	450+10	450+10	450+10	450+10		
	Close (PSIG)	360+15	360+15	360+15	360+15	360+15	360+15	360+15		
LOW PRES SURE SWITCH	Open (PSIG)	25+5	25+5	25+5	25+5	25+5	25+5	25+5		
	Close (PSIG)	50+5	50+5	50+5	50+5	50+5	50+5	50+5		
SHIPPING WEIGHT, Kg.	1500	1600	2000	2000	2500	2655	3200	3500		

Subject To Modification without notice



# OIMT Cooling Towers

The OIMT Cooling Tower provides reliable performance over the full range of cooling tower operating conditions through the use of the most modern industrial quality materials and components, factory - assembled in a modular form, erected quickly and accurately on site. The resulting installation combines the advantages of consistent quality and reduced installation time for large - scale industrial and institutional applications.



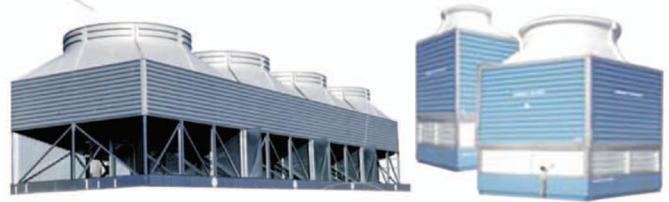


OMRAN TAHVIEH

- Factory-assembled modules
- Industrial quality, heavy-duty, modern materials of construction
- Fast, accurate on-site assembly
- Versatility of selection and layout



## Engineering Data

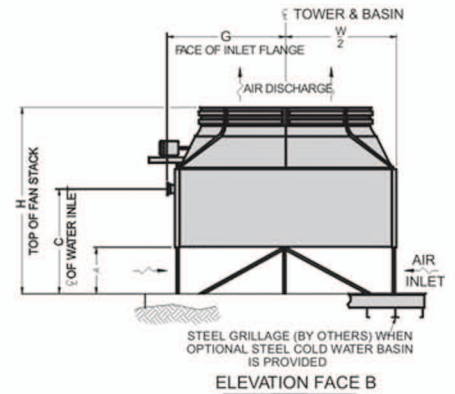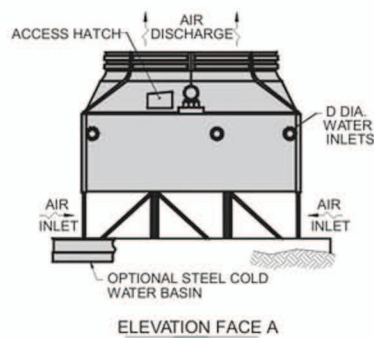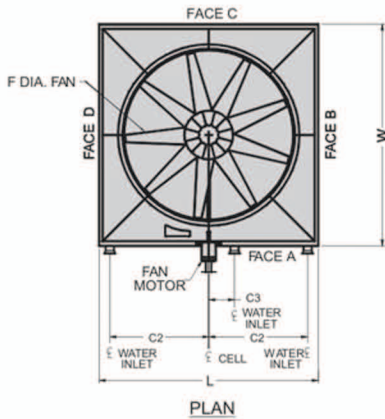

### One Cell Unit:



Model No.	Nominal Tons	HP	CFM	W	L	A	C	H	C 2	C 3	F	D	G
OIMT - 745	728	20	181000										
OIMT - 795	782	25	194000										
OIMT - 850	830	30	206000	19-11 1/2"	19-B 1/4"	5'	11-3 7/16"	20-0 15/16"	8-8 5/16"	N/A	16	10	10-9 15/16"
OIMT - 900	910	40	226000										
OIMT - 975	978	50	243000										
OIMT - 1050	1038	60	258000										
OIMT - 890	896	25	223000										
OIMT - 940	951	30	236000										
OIMT - 1025	1043	40	259000	23-10 3/4"	19-8 1/4"	6'	12-3 7/16"	21-0 15/16"	8-8 5/16"	N/A	16	12	12-9 9/16"
OIMT - 1100	1121	50	279000										
OIMT - 1175	1189	60	295000										
OIMT - 1250	1278	75	318000										
OIMT - 1065	1066	30	265000										
OIMT - 1170	1170	40	291000										
OIMT - 1225	1258	50	312000	23-10 3/4"	23-7 1/2"	6'	12-3 7/16"	21-0 15/16"	10-7 15/16"	2-9 7/16"	18	10	12-9 9/16"
OIMT - 1325	1334	60	331000										
OIMT - 1425	1434	75	356000										
OIMT - 1500	1557	100	387000										
OIMT - 1275	1287	40	32000										
OIMT - 1370	1384	50	344000										
OIMT - 1450	1468	60	365000	23-10 3/4"	27-6 3/4"	6' 6"	12-9 7/16"	21-6 15/16"	12-7 9/16"	2-9 7/16"	18	12	12-9 9/16"
OIMT - 1550	1578	75	392000										
OIMT - 1700	1714	100	426000										

Subject To Modification without notice



# Hygienic Air Handling Unit

## Specification

Hygienic Air Handling Unit was designed by R&D department in order to ensure healthy, fresh and clean air handling in buildings. The fundamental of the design could be summarized as to create a clearable structure not allowing dust accumulation. The basic concept underlying the design, can be summarized as developing a structure that does not allow for the accumulation of dust and dirt and ensure that cleanup is controllable. The observation glass and internal illumination allows for the visibility and control ability of internal hardware.



## Body Structure

- Aluminum Profile frame
- 50 mm thick heat isolated
- Use of closed cell, sealed joints
- Illumination fixtures inlaid, not running over to cells and cleanable
- Coated Panels or stainless steel panels or furnace painted panels

## Corrosion Endurance

- Coated Galvanized or furnace paint over galvanized or stainless steel internal hult in all panels. (Optional)
- Frame consisting of profile frames with coated galvanized steel panels
- Use of copper collector to prevent the corrosion of heater and cooler collector surfaces due to humidity
- Condensing pan that dose not hold water
- Drift elimination made of polypropylene profiles. (Optional)
- Opposed blade air dampers manufactured of aluminum profile, with hidden gear, having airfoil wings with joints and suitable for automatic control applications

## Seating Elements

- Has a structure that prevents microbiologic reproduction
- Based on neoprene that is resistant to disinfectants
- Chemically and physically cleanable

## Fans

- Cleanable, backward inclined, radial fans with few wings are used, These fans are suitable for revolution control, with the frequency converter.
- Plug fan with few wings have been used for easy cleaning

## Filters

- Filter cases with clips have been used to prevent filter leaks
- Prevents microbiologic reproduction
- Filter sealing have been ensured with closed cell joints
- Manometer for tracking of filter pressure drops (optional)
- Filters can easily be dismantled and mounted, due to filter cases



Subject To Modification without notice





## SPECIFICATIONS

COILS	NOMINAL AIR FLOW FACE AREA	SIZE	CFM														
			24	32	40	50	62	80	100	120	150	200	250	320	400	450	
CM	90 °F DB / 72 °F WB	WFR	2400	3200	4000	5000	6250	8000	10000	12000	15000	20000	25000	32000	40000	45000	
			WPD	4.74	6.42	8.00	10.00	12.50	15.81	20.13	23.93	30.00	40.00	50.00	64.00	80.00	90.00
				FT.WG	13.52	19.6	25.30	27.68	34.66	46.20	58.74	73.18	92.56	152.70	163.60	211.20	266.92
		COOLING CAP.	67.60	95.30	126.50	138.40	173.30	231.00	293.70	365.90	462.80	628.50	818.00	1056.00	1334.60	1345.00	
			WER	18.56	25.74	33.02	38.54	48.10	62.92	79.26	97.00	123.28	165.86	194.56	251.42	314.28	358.78
			FT.WG	6.51	10.11	17.99	4.66	4.66	6.91	6.78	10.87	13.97	16.64	9.84	11.76	11.76	16.53
	80 °F DB / 67 °F WB	WFR	92.80	128.70	165.10	192.70	240.90	314.60	396.30	485.00	616.40	829.30	972.80	1257.10	1571.40	1793.90	
			WPD	21.92	30.16	35.48	45.78	57.20	74.30	93.90	113.30	131.60	171.20	228.90	295.22	369.04	421.00
			FT.WG	10.99	16.88	4.53	7.85	7.85	11.55	11.33	17.87	3.35	3.99	7.30	8.68	8.68	11.92
		COOLING CAP.	109.60	150.80	177.40	228.90	286.00	371.50	468.00	566.50	688.30	886.00	1144.50	1476.10	1845.20	2105.00	
			WFR	19.84	27.60	36.00	40.70	51.24	67.48	85.48	104.18	133.66	179.58	232.76	299.22	374.54	382.74
			FT.WG	5.55	8.63	15.73	3.99	4.04	6.25	6.00	9.46	12.32	14.59	26.77	30.58	31.66	6.35
DX	90 °F DB / 72 °F WB	WFR	99.20	138.00	180.00	203.50	256.20	337.40	427.40	520.90	668.30	897.90	1163.80	1496.10	1872.70	1913.70	
			WPD	25.88	35.50	45.38	53.88	67.26	87.36	110.56	133.68	168.94	227.64	271.74	351.86	439.82	500.90
			FT.WG	11.98	18.23	32.16	8.67	8.64	12.66	12.53	19.60	24.91	29.73	18.06	21.80	21.80	30.52
		COOLING CAP.	129.40	177.50	226.90	289.40	336.30	436.80	522.80	668.40	844.70	1138.20	1358.70	1759.30	2199.10	2504.50	
			WFR	30.54	41.80	50.00	63.96	79.96	103.34	129.66	156.90	168.00	25.00	319.90	411.80	514.80	284.60
			FT.WG	20.12	30.55	8.17	14.50	14.50	21.12	20.85	32.37	6.35	7.53	13.52	16.00	16.01	21.76
	90 °F / 80 °F	WFR	152.70	209.00	250.00	319.80	399.80	516.70	648.30	784.50	930.00	1250.00	1599.50	2059.00	2574.00	2923.00	
			WPD	71.10	96.30	120.00	150.00	187.50	237.10	301.90	358.90	449.90	599.90	749.90	959.90	1199.90	1349.80
			FT.WG	86.10	116.70	145.40	181.70	221.20	287.30	365.80	434.90	545.20	726.90	908.70	1163.10	1453.90	1635.60
		COOLING CAP.	92.90	125.80	156.80	196.00	245.00	309.90	394.60	468.00	588.10	784.10	1080.10	1254.50	1568.10	1764.10	
			WFR	109.80	148.70	185.30	231.70	289.60	366.30	466.40	554.40	695.00	926.70	1158.40	1482.70	1853.40	2085.10
			FT.WG	118.40	160.40	199.90	249.90	312.40	395.10	503.00	598.00	749.70	999.50	1249.40	1599.30	1999.10	2249.00
HW	90 °F DB AET	6.12	8.30	10.64	13.60	17.00	21.50	27.40	32.54	40.80	54.40	68.00	87.04	108.80	122.40		
		WPD	3.10	6.70	12.30	3.20	3.20	4.00	4.70	7.40	9.40	11.40	2.90	3.40	3.40	4.70	
		FT.WG	61.20	83.00	106.40	136.00	170.00	215.00	247.00	325.40	408.00	544.00	680.00	870.40	1088.00	1224.00	
	70 °F DB AET	11.57	15.66	19.52	24.40	30.50	35.58	49.90	59.35	74.40	99.20	124.00	158.72	198.40	223.20		
		WFR	2.80	6.10	8.90	2.60	2.60	3.80	4.00	6.30	8.00	8.90	2.30	2.90	2.90	4.0	
		FT.WG	115.70	156.60	195.20	244.00	305.00	385.80	466.10	593.50	744.00	992.00	1240.00	1587.20	1984.00	2232.00	
STM	70 °F DB AET	106.20	143.80	179.20	224.00	280.00	354.10	450.90	536.00	672.00	896.00	1120.00	1433.60	1792.00	2016.00		
		MBH	191.50	259.40	323.20	404.00	505.00	638.70	813.25	966.80	1212.00	1616.00	2020.00	2585.60	3232.00	3636.00	

CFM, 2 PSIG STEAM PRESSURE "WPD-WTR PRESS DROP" WFR-WTR FLOW RATE  
 CFM, ET = 45 °F HW-COIL CAPACITY AT NOM. CFM, ET = 45 °F HW-COIL CAPACITY AT NOM. CFM, ET = 45 °F HW-COIL CAPACITY AT NOM.  
 MBH = 1000 BTUH  
 MBH = 1000 BTUH

OMRAN TAHVIEH



Subject To Modification without notice



## Air Handling Unit

### COMPONENTS DESCRIPTION

OM - AH Serie Units Sections are available with various accessories in order to provide maximum compliance to most complex specification.

The following accessories are listed and described :

#### ABS - Common base frame

acting as the skid collecting all section within specified arrangement. ABS is equipped with lifting lugs to enable easy handling of the unit during transportation and installation.

#### Attached - Top cover as

weather proofing component of outdoor unit .ATC is made with slight pitch down from the center line finishing with channel gutters on either sides to avoid rain water splash at side of the unit.

#### ASM - Spring mounts

for Fan floating base instead of standing rubber mounts for precisely specified anti vibration protection requirement. ASM selection of different static deflections is available at request.

#### AIL - Air intake louver

for application on outdoor units or industrial units with free return. Ail are of standard fixed design with bird screen in front of wire mesh and sized according to selected air intake damper (DAI) for 100 % (full), 50 % and 25 % air flow.

#### ASL - Air intake sand louver for

coarse sand extraction prior the entry in the unit as considerable help in pre - filtration process in areas where sandstorms are frequent.



#### ARR - Rain Hood

for air intake of outdoor unit. ARR is completely projected over air Intel opening and equipped with bird screen in front of wire mesh. The use of ARR is protecting the unit from rain drops penetration through air intake regardless of rainstorm intensity and direction.

#### ABD - BY - pass duct

as obligatory accessory to Face and Bypass control damper. ABD is providing accessory alternative air passage around the coil.

#### ABD is provided with perforated

restructure, when required, for air flow balance, as the same is Essential for proper functioning of Bypass control.

#### AFC - Flexible duct connector, to

be used if required by specification for complete anti - vibration disconnect from dusting system .AFC is available for all types of fans' outlets as well as for all other connections. This accessory is not required with This type of unit as all vibration is held at floating fan base but some specification are asking for the same for more protection.

## AWS Air Washer Section

evaporative cooler produces effective cooling by combining a natural process water. evaporation with a simple reliable Air-moving system, fresh outside air is pulled through nozzles section or moist pads, where it is cooled by evaporation and circulated through a building by blowers.





# OTC Series ( 400-1600 TR )

## GENERAL SPECIFICATION


**STRUCTURE:** The structure is designed to withstand wind load of 30 psf . Trapezoidal cooling towers consists of modular bolted subassemblies cross - braced with tension rods.

**CASING:** Casing of galvanized steel sheets give full protection against corrosion , corrugated asbestos cement board casing is applied with vertical corrugations is another alternate for trapezoidal cooling towers .Corrugated casing joints are lapped .

**BASINS:** Heavy gauge galvanized steel sheets or concrete are used to fabricate basins. Tower basins are completed with make up water float control valve as well as over flow, drain and suction fitting.



**FILLING:** Preservative - treated Russian or Finn timber are used. Design assures permanent fill alignment and configuration.

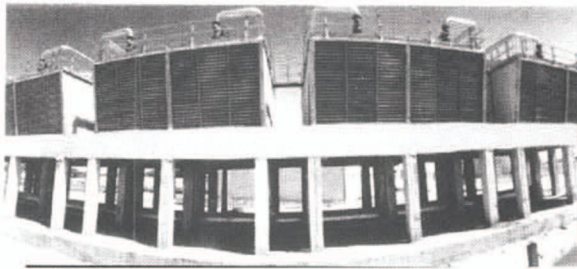

**CONCRETE BASIN COOLING TOWER**



**TABLE: 1**  
**OMRAN TAHVIEH Trapezoidal Cooling Tower Approximate Dimensional Data:**

MODEL	TONS NOMINAL	LENGHT		WIDTH	HIGHT		FAN NO.x DIA	MOTOR HP	PIPING CONNECTIONS					APPROXIMATE WEIGHT	
		AT FAN DECK LEVEL	AT BASIN LEVEL		BODY	TOTAL			INLET	OUTLET	OVER FLOW	MAKE UP	DRAIN	x10 <sup>3</sup> Kg	
		TR	L		h	H			f	HP	INLET	OUTLET	OVER FLOW	MAKE UP	DRAIN
OTC 400 - 1	400	6500	5500	2500	2350	3400	1 x 2050	10	2 x 5"	8"	1 1/2"	1"	3"	4.5	10
OTC 500 - 1	500	6500	5500	2850	2550	3600	1 x 2200	15	2 x 5"	8"	1 1/2"	1"	3"	5.2	12
OTC 600 - 1	600	6800	5800	2850	2950	4000	1 x 2200	20	2 x 6"	10"	2"	1 1/2"	4"	5.9	13
OTC 700 - 1	700	6800	5800	2850	3350	4400	1 x 2200	20	2 x 6"	10"	2"	1 1/2"	4"	6.3	14.2
OTC 800 - 1	800	7000	6000	3000	3450	4500	1 x 2300	20	2 x 6"	10"	2"	1 1/2"	4"	7.1	15.5
OTC 1000 - 2	1000	6500	5500	5700	2550	3600	2 x 2200	2 x 15	4 x 5"	12"	2"	2"	5"	10.4	24
OTC 1200 - 2	1200	6800	5800	5700	2950	4000	2 x 2200	2 x 20	4 x 6"	14"	2"	2"	5"	11.8	26
OTC 1400 - 2	1400	6800	5800	5700	3350	4400	2 x 2200	2 x 20	4 x 6"	14"	2"	2"	5"	12.6	28.4
OTC 1600 - 2	1600	7000	6000	6000	3450	4500	2 x 2300	2 x 20	4 x 6"	14"	2"	2"	5"	14.2	31

All dimensions are in mm



**CROSS FLOW TOP DISCHARGE (TRAPEZOIDAL) HDGS BASIN COOLING TOWERS**

## WATER DISTRIBUTION

Gravity water distribution system for uniform distribution of hot water over the entire fill area IS considered , using flange and collector.


**FAN:** Low speed, noiseless, multi -blade pressed galvanized steel or aluminum induced-draft propeller fans are standard equipment on some OMRAN TAHVIEH cross flow cooling towers. Fans are designed to grantee adequate air flow between suction and discharge ports for the provision of maximum heat transfer and tower performance requirements.

**DRIVE:** Cubic cooling tower fans are belt drive or geareducer drive as well as belt drive. Option of double speed fan for belt drive cooling towers on request is possible.

OMRAN TAHVIEH



# OMB F.R.P Cooling Tower

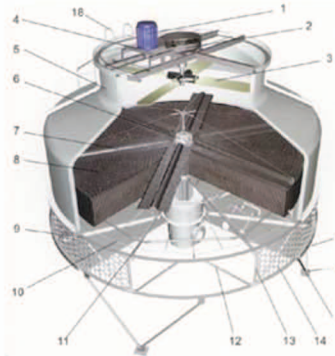

- 1. Motor (TEFC)
- 2. V-Belt Reducer
- 3. Fan
- 4. Motor Support
- 5. Fan Stack (FRP)
- 6. Sprinkler Head
- 7. Sprinkler System
- 8. In-fill
- 9. Frame
- 10. Infill Mesh



**CLOSED TYPE**



**OPENED TYPE**

- 11. Infill Support
- 12. Air Inlet Slant Post
- 13. Air Inlet Post
- 14. Air Inlet Mesh
- 15. Tower Stand Support
- 16. Tower Support Plate
- 17. Basin(FRP)
- 18. Ladder

## 2.1 Principle of operation

The automatic rotating sprinkler system distributes the hot water evenly over the entire fill section. Dry air is simultaneously drafted upward causing evaporation and so, the heat is removed. The cooled water falls into the basin and is pumped to the heat source for recirculation.

## 2.2 Thermal design

The "Omran" cooling towers operate on the counter flow principle which gives the best performances. The air flow through the tower in fill is opposed to the water flow.

## 2.3 Better Air Flow

The rotating water sprinkler head distributes the hot water within forming a fine spray, and hence does not need the conventional type of moisture eliminator. This is because the water header has large number of holes giving a 'steam' type flow direct into the infill. Towers with fixed nozzles cannot obtain the coverage, which is needed for optimum cooling. We should not overlook that in rectangular type towers, eliminators provide a pressure drop which evens out the flow particularly into the Corner.

## 2.4 Pumping head

As seen already, the water distribution by a rotating header, is a significant

part of the "Omran" tower design. The large diameter holes in the rotating header give a gentle stream of water at negligible pressure loss. Also, there is no risk of 'clogging', as can easily happen with spray nozzles in other types of towers. The "Omran" cooling towers pumping head, is the static height of the spray or header pipe above the water level in the basin, plus the pressure loss through the Rotating header, sprays of balancing valves, according to the type of tower being Considered.

## 2.5 Life Factor

Although we generally refer to the towers as being constructed of fiberglass, we should actually refer to them as being FRP (Fiberglass Reinforced Plastic) FRP should not be confused with the translucent fiberglass roofing panels, and in particular with the cheaper grades which have given poor results even only in a few years.

## 2.6 Smaller Fan Motors

The lower H.P rating of the motor used in "Omran" towers therefore leads to a substantial saving in annual energy cost.

Model	Motor Power	Fan Dia.	Dimension		Connections						
			Hight	Dia.	Inlet	Outlet	Over Flow	Drain	Make Up	Quick Fill	
OMB-8	0.5	0.79	-	1.19	-	-	-	-	-	-	-
OMB-10	0.5	0.79	-	1.19	-	-	-	-	-	-	-
OMB-15	0.5	0.79	-	1.19	-	-	-	-	-	-	-
OMB-20	1	0.79	-	1.5	-	-	-	-	-	-	-
OMB-25	1	0.79	-	1.5	-	-	-	-	-	-	-
OMB-30	1	0.83	-	1.78	-	-	-	-	-	-	-
OMB-40	1	0.83	2	1.78	3	3	1	1	1/2	-	-
OMB-50	1.5	1.17	2.48	2.1	3	3	1	1	3/4	-	-
OMB-60	2	1.17	2.48	2.1	4	4	1 1/2	1 1/2	3/4	-	-
OMB-80	2	1.17	2.48	2.1	4	4	1 1/2	1 1/2	3/4	-	-
OMB-90	2	1.2	2.35	2.59	4	4	1 1/2	1 1/2	3/4	-	-
OMB-100	3	1.2	2.57	2.59	4	4	1 1/2	1 1/2	3/4	-	-
OMB-125	4	1.45	2.62	2.95	5	5	1 1/2	1 1/2	3/4	3/4	3/4
OMB-150	5.5	1.45	2.62	2.95	5	5	1 1/2	1 1/2	3/4	3/4	3/4
OMB-175	5.5	1.72	2.92	3.71	6	6	1 1/2	1 1/2	3/4	3/4	3/4
OMB-200	5.5	1.72	2.92	3.71	6	6	1 1/2	1 1/2	1	1	1
OMB-225	7.5	1.72	3.66	3.71	6	6	1 1/2	1 1/2	1	1	1
OMB-250	7.5	1.72	3.66	4.39	6	6	1 1/2	1 1/2	1	1	1
OMB-300	7.5	1.72	3.66	4.39	8	8	3	1 1/2	1	1	1
OMB-350	10	2.32	3.68	4.85	8	8	3	1 1/2	1	1	1
OMB-400	15	2.32	3.68	4.85	8	8	3	1 1/2	1	1	1
OMB-450	15	2.95	4.04	5.51	10	10	4	3	2	2	2
OMB-500	15	2.95	4.27	5.51	10	10	4	3	2	2	2
OMB-600	15	3.2	4.83	6.53	10	10	4	3	2	2	2
OMB-700	20	3.2	4.83	6.53	10	10	4	3	2	2	2
OMB-800	25	3.5	4.83	7.59	12	12	4	3	3	3	3
OMB-1000	30	3.5	5.23	7.59	12	12	4	3	3	3	3
OMB-1250	30	3.5	5.56	7.59	12	12	4	3	3	3	3



# OFCC Cooling Towers

## GENERAL SPECIFICATIONS OF COUNTER FLOW HDGS COOLING TOWERS

OMRAN TAHVIEH COUNTER FLOW COOLING TOWERS FURNISH AND INSTALL, AS SHOWN ON THE PLAN DRAWINGS.

**CASING:** The casing of galvanized steel sheets gives full protection against corrosion.

**BASINS:** Heavy gauge galvanized steel sheets are used to fabricate basins. Tower basins are completed with make up water float control valve as well as over flow, drain and suction fitting.

**WATER DISTRIBUTION:** Water shall be distributed evenly over the tower fill area by a water distribution system consisting of galvanized steel header and spray nozzles.


**FILLING:** Fill elements shall be made of PVC or ABS materials. Fill elements shall have sufficient contact area for removal of heat.

**FAN:** Statically and dynamically balanced forward curved centrifugal fans with a rigid housing shall be used on all counter flow OMRAN TAHVIEH cooling towers.

**DRIVE:** OFCC cooling towers fans are belt driven.



OMRAN TAHVIEH

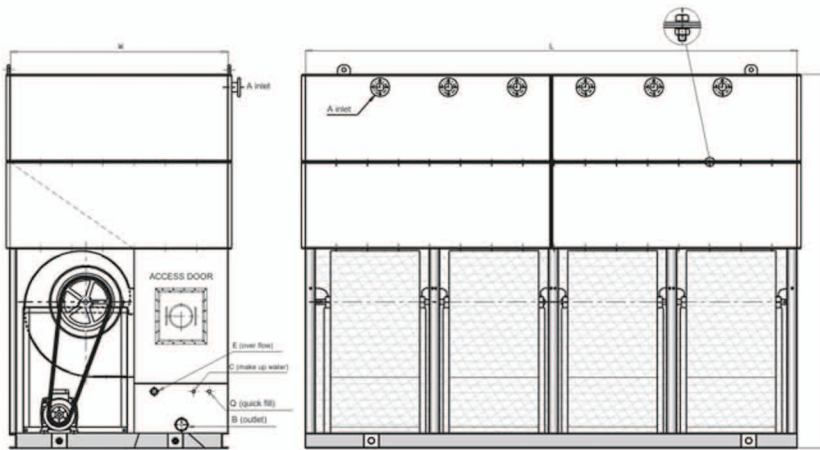

Subject To Modification without notice

Model No.	NOMINAL TONS	GPM NOMINAL	MOTOR (QNT.) × HP	BLOWER		WEIGHT (kg)	
				QNT.	DIA.	NET	OPER.
1 OFCC 10	10	30	1 × 3/4	1	15"	310	360
1 OFCC 15	15	45	1 × 1	1	15"	320	370
1 OFCC 20	20	60	1 × 1 1/2	1	15"	400	480
1 OFCC 25	25	75	1 × 2	1	18"	480	500
1 OFCC 30	30	90	1 × 3	1	18"	470	620
1 OFCC 35	35	105	1 × 3	1	22"	600	800
1 OFCC 40	40	120	1 × 3	1	22"	700	1000
1 OFCC 50	50	150	1 × 3	1	22"	800	1050
1 OFCC 60	60	180	1 × 4	1	22"	900	1200
1 OFCC 75	75	225	1 × 5.5	1	22"	1050	1500
1 OFCC 90	90	270	1 × 7.5	1	22"	1400	1950
1 OFCC 105	105	315	1 × 7.5	2	22"	1700	2300
1 OFCC 120	120	360	1 × 10	2	22"	1800	2400
1 OFCC 140	140	420	1 × 15	2	22"	1900	2600
1 OFCC 160	150	480	1 × 10 + 1 × 5.5	3	22"	2700	3600
1 OFCC 180	180	540	1 × 10 + 1 × 5.5	3	22"	2800	3850
1 OFCC 200	200	600	1 × 10 + 1 × 5.5	3	22"	3000	4300
1 OFCC 250	250	750	2 × 10	4	22"	3500	5000
1 OFCC 300	300	900	2 × 10 + 1 × 5.5	5	22"	4200	6000
1 OFCC 350	350	1050	3 × 10	6	22"	5000	7000
1 OFCC 400	400	1200	3 × 10	6	22"	5400	7500
1 OFCC 450	450	1350	3 × 10 + 1 × 5.5	7	22"	6000	8500
2 OFCC 500	500	1500	4 × 10	8	22"	7000	9500
2 OFCC 600	600	1800	4 × 10 + 2 × 5.5	10	22"	8500	11500
2 OFCC 700	700	2100	6 × 10	12	22"	10000	13500
2 OFCC 800	800	2400	6 × 10	12	22"	11500	16000
2 OFCC 900	900	2700	6 × 10 + 2 × 5.5	14	22"	13000	18000
2 OFCC 1000	1000	3000	8 × 10	16	22"	13200	18500
2 OFCC 1200	1200	3600	10 × 10	20	22"	16000	22000



# OFCB Series (10 - 1200 TR)

## GENERAL SPECIFICATIONS OF COUNTER FLOW HDGS COOLING TOWERS

OMRAN TAHVIEH COUNTER FLOW COOLING TOWERS FURNISH AND INSTALL, AS SHOWN ON THE PLAN DRAWINGS.

**CASING:** The casing of galvanized steel sheets gives full protection against corrosion.

**BASINS:** Heavy gauge galvanized steel sheets are used to fabricate basins. Tower basins are completed with make up water float control valve as well as over flow, drain and suction fitting.

**WATER DISTRIBUTION:** Water shall be distributed evenly over the tower fill area by a water distribution system consisting of galvanized steel header and spray nozzles.



**FILLING:** Fill elements shall be made of PVC or ABS materials. Fill elements shall have sufficient contact area for removal of heat.

**FAN:** Statically and dynamically balanced forward curved centrifugal fans with a rigid housing shall be used on all counter flow OMRAN TAHVIEH cooling towers.

**DRIVE:** OFCB cooling towers fans are belt driven.

Model No.	NOMINAL RATING		DIMENSIONS (mm)			BLOWERS		MOTOR		AIRFLOW	PD	WEIGHT (kg)	
	TONS	GPM	L	W	H	NO.	Size (in)	NO.	hp.	CFM	ft	SHIPPING	OPER.
OFCB 10 - 1	10	30	500	950	2000	1	15	1	3/4	2800	22	270	380
OFCB 15 - 1	15	45	720	950	2000	1	15	1	1.5	4200	22	320	480
OFCB 20 - 1	20	60	1000	950	2000	1	18	1	2	5400	22	380	580
OFCB 25 - 1	25	75	1000	1250	2000	1	20	1	3	7000	22	460	720
OFCB 30 - 1	30	90	1000	1450	2000	1	22	1	3	8400	22	570	860
OFCB 35 - 1	35	105	1000	1750	2000	1	22	1	4	9800	22	640	990
OFCB 40 - 1	40	120	1000	1950	2000	1	22	1	5.5	11300	22	690	1080
OFCB 50 - 1	50	150	1200	1950	2000	1	22	1	7.5	14000	22	800	1300
OFCB 60 - 1	60	180	1450	1950	2750	1	22	1	7.5	17000	23	980	1750
OFCB 75 - 2	75	225	1750	1950	2750	2	22	1	10	21000	23	1400	2500
OFCB 90 - 2	90	270	1950	1950	2750	2	22	1	10	23500	23	1450	2600
OFCB 105-2	105	318	2400	1950	2750	2	22	1	10	28000	23	1600	3000
OFCB 120-3	120	360	2900	1950	2750	3	22	2	1 × 10 1 × 5.5	34000	23	2050	3800
OFCB 140 - 3	140	420	3350	1950	2750	3	22	2	1 × 10 1 × 5.5	39000	23	2300	4200
OFCB 160 - 4	160	480	3900	1950	2750	4	22	2	10	45000	23	2900	5100
OFCB 180 - 4	180	540	4200	1950	2750	4	22	2	10	48500	23	3000	5400
OFCB 220-5	220	660	4900	1950	2750	5	22	3	2 × 10 1 × 5.5	55000	23	3500	6300
OFCB 260 - 6	260	780	5800	1950	2750	6	22	3	3 × 10	66000	23	4100	7400
OFCB 300-7	300	900	6800	1950	2750	7	22	4	3 × 10 1 × 5.5	78000	23	4800	8700
OFCB 340 - 8	340	1020	7800	1950	2750	8	22	4	4 × 10	89000	23	5400	9900
OFCB 340 - 8	340	1020	3900	3800	2750	8	22	4	4 × 10	89000	23	5300	9700
OFCB 400-10	400	1200	4900	3800	2750	10	22	6	4 × 10 2 × 5.5	110000	23	6300	11800
OFCB 450 - 12	450	1350	5700	3800	2750	12	22	6	6 × 10	128000	23	7800	14100
OFCB 500 - 12	500	1500	5850	3800	2750	12	22	6	6 × 10	132000	23	7900	14400
OFCB 530 - 14	530	1740	6800	3800	2750	14	22	8	6 × 10 6 × 5.5	152800	23	9000	16600
OFCB 660 - 16	660	1990	7800	3800	2750	16	22	8	8 × 10	175000	23	10400	19100
OFCB 740-18	740	2220	8750	3800	2750	18	22	10	8 × 10 2 × 5.5	196500	23	11600	21400
OFCB 820 - 20	820	2460	9790	3800	2750	20	22	10	10 × 10	219000	23	12900	23800
OFCB 900 - 20	900	2700	10700	3800	2750	22	22	12	10 × 10 2 × 5.5	240000	23	14000	25900
OFCB 980 - 24	980	2940	11650	3800	2750	24	22	12	12 × 10	262000	23	15200	28200
OFCB 1050 - 26	1050	3130	12650	3800	2750	26	22	14	12 × 10 2 × 5.5	284000	23	16500	30500
OFCB 1140 - 28	1140	3420	13690	3800	2750	28	22	14	14 × 10	305600	23	17600	32700

Subject To Modification without notice



### OCC Series (15-300 TR)

#### CROSS FLOW SIDE DISCHARGE (CUBIC) COOLING TOWERS



Belt driven

#### FEATURES:

- HDGS Axial Fan.
- Low consumption electro motor.
- Rugged heavy-guage galvanized steel structure.
- Splash-fill and drift eliminator bars.
- Lower operating and maintenance costs.

OMRAN TAHVIEH



#### OMRAN TAHVIEH Cubic Cooling Tower Approximate Dimensional Data:

MODEL	TONS NOMINAL TR	LENGHT L	WIDTH W	HIGHT		FAN NO.x DIA f	MOTOR No. X HP	PIPING CONNECTIONS					APPROXIMATE WEIGHT Kg	
				BODY h	TOTAL H			INLET	OUTLET	OVER FLOW	MAKE UP	DRAIN	SHIPPING	OPERATING
OCC 15 -1	15	1300	1000	1500	1720	1 x 850	1 x 1/2	2 1/2"	2 1/2"	1/2"	1/2"	11/2"	370	800
OCC 20 -1	20	1300	1000	1600	1820	1 x 850	1 x 3/4	2 1/2"	2 1/2"	1/2"	1/2"	11/2"	400	900
OCC 25 -1	25	1300	1000	1700	1920	1 x 850	1 x 3/4	2 1/2"	2 1/2"	1/2"	1/2"	11/2"	500	1050
OCC 30 -1	30	1300	1000	1800	2020	1 x 1200	1 x 1	2 1/2"	2 1/2"	1/2"	1/2"	11/2"	580	1300
OCC 40 -1	40	2350	1450	1750	1970	1 x 1200	1 x 1	3"	3"	3/4"	1/2"	2"	810	1500
OCC 50 -1	50	2350	1450	1850	2070	1 x 1200	1 x 1.5	3"	3"	3/4"	1/2"	2"	1200	2300
OCC 65 -1	65	2350	1450	1950	2170	1 x 1200	1 x 1.5	3"	3"	3/4"	1/2"	2"	1300	2550
OCC 75 -1	75	2350	1450	2050	2270	1 x 1200	1 x 2	3"	3"	3/4"	1/2"	2"	1400	2700
OCC 90 -1	90	2500	1700	1950	2170	1 x 1350	1 x 2	4"	4"	1"	3/4"	2 1/2"	1700	3000
OCC 110 -1	110	2500	1700	2050	2270	1 x 1350	1 x 3	4"	4"	1"	3/4"	2 1/2"	2100	3300
OCC 130 -1	130	2500	1700	2150	2370	1 x 1350	1 x 4	4"	4"	1"	3/4"	2 1/2"	2400	3800
OCC 150 -1	150	2600	1700	2250	2470	1 x 1400	1 x 5.5	4"	4"	1"	3/4"	2 1/2"	2600	4000
OCC 180 -2	180	2500	3380	1950	2170	1 x 1350	2 x 2	2 x 4"	6"	1"	3/4"	3"	3200	5800
OCC 220 -2	220	2500	3380	2050	2270	1 x 1350	2 x 3	2 x 4"	6"	1"	3/4"	3"	3900	6500
OCC 260 -2	260	2500	3380	2150	2370	1 x 1350	2 x 4	2 x 4"	6"	1"	3/4"	3"	4400	7500
OCC 300 -2	300	2600	3380	2250	2470	1 x 1400	2 x 5.5	2 x 4"	6"	1"	3/4"	3"	5000	9000

All dimensions are in mm



Shaft and Bearing

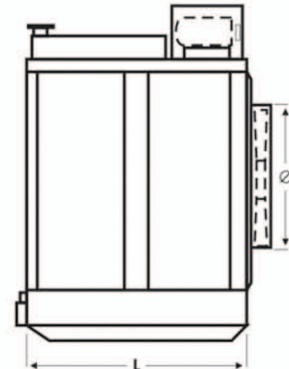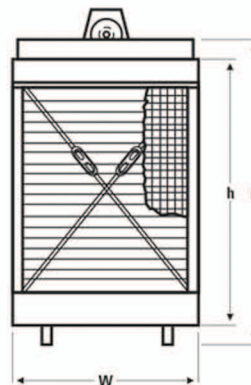

Subject To Modification without notice



# Series V Closed Circuit Cooling Tower

Closed Loop cooling system provide many operational and maintenance benefits to the end user:

- Maximize System Efficiency
- Minimize System Fouling
- Lower System Maintenance Costs
- Reduce System Energy Cost with free Cooling
- Eliminate Plume and Water Costs with Dry Operation


The Omran Closed Circuit Cooling Tower Provide efficient operation for closed loop cooling applications to meet the demands of today's air conditioning, equipment cooling, and industrial process cooling system. Omran Closed Circuit Cooling Tower are selected for numerous commercial and industrial process cooling applications.

- Water source heat pumps
- Self-contained units
- Chillers
- Free cooling
- Optimized evaporative and dry cooling in a single unit.
- Special fluids
- Compressor cooling
- Machine jacket cooling
- Induction furnaces
- Multiple independent loads in a single unit.




## Principle of Operation

The Omran Series V Closed Circuit Cooling Tower combines the functions of an open cooling tower and heat exchanger by replacing the wet deck surface with a coil type heat exchanger. The liquid to be cooled is circulated through a continuous serpentine coil, which is continually wetted on the outside by a recirculating water system. Air is simultaneously blown upward over the coil, causing a small portion of the recirculated water to evaporate. This evaporation removes heat from the coil, cooling the liquid in the coil.

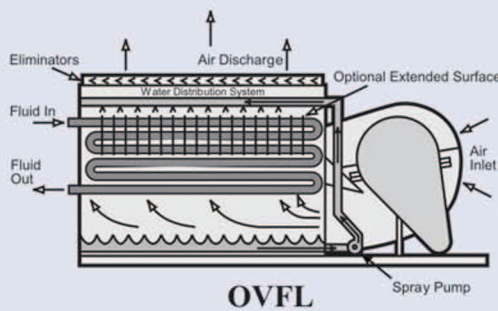

OVFL



OVFI

Model No.	Weight		CFM	Fan Motor (hp)	Pump Motor (hp)	Spray Pump (gpm)	Connections		L	W	H
	Approx Shpg. (lb)	Approx Oper (lb)					Size (in)	F			
OVF 1-009-12 G	1,625	1,875	5,690	3		35		1'-10 3/4"	3'-0"	3'-111/2"	7'-3 3/4"
OVF 1-009-22 G	1,785	2,075	5,590	3	1/3	35	3	2'-73/4"			8'-1/4"
OVF 1-009-32 G	1,965	2,295	5,520	3		35		3'-3 3/4"			8'-8 3/4"
OVF 1-009-42 G	2,125	2,495	5,470	3		35		3'-11 3/4"	9'-43/4"		
OVF 1-018-02 H	2,175	2,635	11,180	5		75		1'-1/4"	6'-0"	3'-111/2"	6'-71/4"
OVF 1-018-12 H	2,415	2,955	10,930	5		75		1'-9 3/4"			7'-33/4"
OVF 1-018-22 J	2,640	3,260	12,310	7.5	1/2	75	4	2'-61/4"			8'-1/4"
OVF 1-018-32 J	2,940	3,660	12,150	7.5		75		3'-2 3/4"	8'-83/4"		
OVF 1-018-42 J	3,190	4,010	12,030	7.5		75		3'-11 1/4"	9'-51/4"		
OVF 1-027-22 H	3,830	4,940	14,060	5		115		2'	8'-113/4"	3'-111/2"	7'-6"
OVF 1-027-22 J	3,750	4,860	16,090	7 1/2		115	4	2'-91/4"			8'-31/4"
OVF 1-027-32 K	4,108	5,440	17,490	10	3/4	115		3'-61/2"			9'-1/2"
OVF 1-027-42 K	4,570	5,970	17,310	10		115		4'-3 3/4"	9'-93/4"		
OVF 1-036-21 L	4,760	6,280	24,870	15		150		2'-9 1/4"	8'-31/4"		
OVF 1-036-31 L	5,310	7,020	24,560	15	1	150		3'-61/2"	9'-1/2"		
OVF 1-036-41 L	5,810	7,710	24,310	15		150	4	4'-3 3/4"	9'-93/4"		
OVF 1-036-51 L	6,310	8,390	24,100	15		150		5'-1"	10'-7"		
OVF 1-048-21 M	7,870	10,230	35,790	20		220		2'-9 1/4"	11'-11 1/2"	4'-85/8"	9'-11 5/8"
OVF 1-048-31 N	8,460	11,390	38,070	25	1 1/2	220	4	3'-6 1/2"			10'-87/8"
OVF 1-048-41 N	9,320	12,690	37,690	25		220		4'-3 3/4"			11'-61/8"
OVF 1-072-210	10,720	15,670	52,650	30		305		2'-9 1/4"	11'-37/8"		
OVF 1-072-310	12,050	17,380	51,990	30	2	305	4	3'-61/2"	12'-11/8"		
OVF 1-072-410	12,480	18,000	51,460	30		305		4'-3 3/4"	12'-103/8"		


\* Unit ships in one piece .

Subject To Modification without notice




### Series O10 - Series O15

#### CROSS FLOW COOLING TOWERS

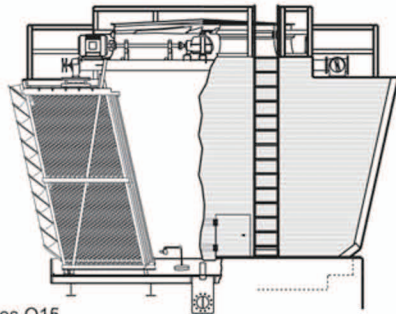

Series O15

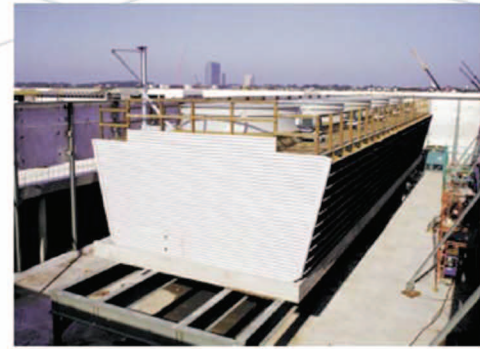

OMRAN TAHVIEH



#### The Quality Advantage



- Lower operating costs. Adjustable pitch fans with true airfoil blades and 98% efficient Geareducer drive assure maximum utilization of applied fan power. Computer optimized fill configuration and low pressure - drop drift eliminators afford maximum cooling with minimum power input. Gravity flow water distribution minimizes pump power requirements.





- Lower maintenance costs. Heavy - duty aluminum alloy fans, cast-iron Geareducers, and stainless steel drive shafts require only periodic maintenance. Low - maintenance materials are used throughout the cooling tower. Wide spaced splash - fill helps prevent clogging. The fill area is readily accessible for cleaning.

- Two - year drive train warranty.

- Single - source parts availability. All tower components except the electric motors are manufactured, guaranteed, and stocked by Omran.



#### Series O15 Schematic

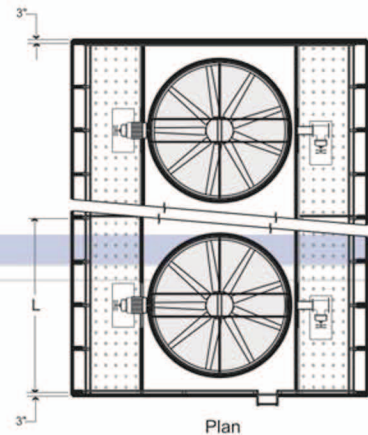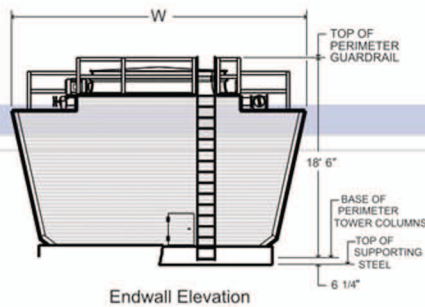

Tower Model Note 1	GPM per Cell	Dimensions		
		L	W	Fan diameter
OT451-201	201-2400	12' 0"	25' 0"	120"
OT452-201	270-3200	16' 0"	27' 0"	144"
OT453-201	340-4000	20' 0"	29' 0"	168"
OT454-201	410-4800	24' 0"	29' 0"	168"
OT456-201	285-3360	12' 0"	29' 0"	120"
OT457-201	380-4480	16' 0"	31' 0"	144"
OT458-201	475-5600	20' 0"	33' 0"	168"
OT459-201	570-6720	24' 0"	33' 0"	168"



# Series Cubic Tower

## Steel Crossflow Cooling Tower

### THE CUBICTOWER ADVANTAGE



■ **Induced - Draft Design.** Save on fan power and avoid the water leaks typical in forced - draft - Pressurized - Towers. The fan will operate in a warm atmosphere even in winter, so you'll never have to work on frozen mechanical equipment.

■ **Crossflow Design.** Save on pump power because you only pay to move the water to the top of the tower. Gravity does the rest. The mechanical equipment and water distribution system are out where you can easily maintain them.

■ **All-Season Reliability.** Cubic towers perform as specified in the heat of summer. They respond well to energy management techniques in the spring and fall and with appropriate fan controls, they can operate virtually ice-free in the dead of winter. Plus they offer simple maintenance all year long.


■ **PVC Film Fill with Integral Drift Eliminators and Louvers.** If you've ever had to replace deteriorated eliminators or louvers, you'll appreciate this advantage. Now those components are molded right in the PVC fill sheets. Integral honey comb louvers keep the circulating water inside your tower.

■ **Select Your Aqua tower From This Bulletin.** The table on page 6 should be adequate for almost all your requirements. If available space is a problem, or if you run into some unusual operating requirements, we'll be glad to help.

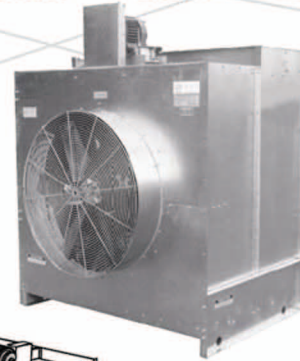

■ **Simple, Flexible Installation.** Just mount the motor, belts and belt guard, install the outlet connection that suits your needs-both side suction and bottom outlet are provided, complete with screens-and adjust the float valve.

### Schematic

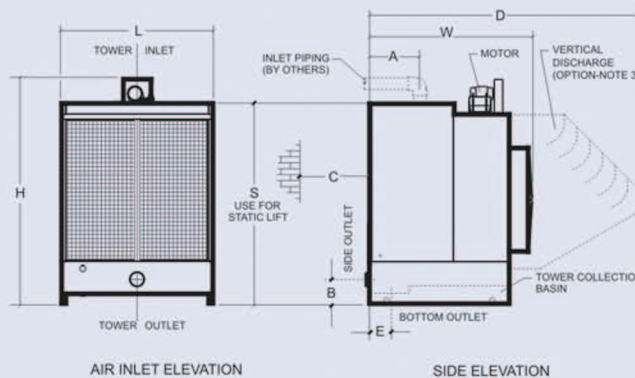

Tower Model	Nominal Tons 1	Dimensions									Motor hp	Piping Connections		
		L	W	H	A	B	C	D	E	S		Inlet	Outlet 6	
OC480A	8	2-11 1/2"	4-2 7/8"	5-3 3/8"	1-3 13/816"	9 7/8"	2-0"				4-3 7/8"	1/3"	2"	2" F
OC480B	10	902mm	1292mm	1610mm	402mm	175mm	610mm			note 6	1318mm	1		
OC492A	22	3-11 1/2"	5-0 3/4"	7-4 1/2"	1-5"	9 1/2"	4-0"			8"	6-5"	1		
OC492B	28	1206mm	1643mm	2248mm	432mm	241mm	1219mm	note 3		203mm	1956mm	2	4"	4" M
OC493A	36	5-11 1/2"	5-1"	7-4 1/2"	1-5"	9 1/2"	5-0"			8"	6-5"	2		
OC493B	42	1816mm	1549mm	2248mm	432mm	241mm	1524mm			202mm	1956mm	3		
OC494A	51	5-11 1/2"	6-5 5/8"	9-0"	9-0"	11 1/2"	6-0"	10-8"		9 1/4"	7-10 5/8"	2		
OC494B	57	1818mm	1972mm	2743mm	2743mm	292mm	1829mm	3251mm		235mm	2403mm	3		
OC494C	68											5		
OC495A	80	7-11 1/2"	6-5 3/4"	9-0"	1-11 15/16"	11 1/2"	7-0"	10-8"		9 1/2"	7-10 5/8"	5	6"	6" MC
OC495B	91	2426mm	1875mm	2743mm	2743mm	292mm	2134mm	3251mm		235mm	2403mm	7 1/2"		
OC496A	111	9-11 1/2"	6-6 1/8"	9-8 1/4"	1-11 3/16"	11 1/2"	9-0"	10-11 11/16"		9 1/4"	8-6 3/4"	6		
OC496B	126	3035mm	1884mm	2953mm	2953mm	292mm	2743mm	3345mm		235mm	2610mm	7 1/2"		





# OFCB-IND-DZ Dust Proof Cooling Towers

**Designed for cement plants, steel plants, gypsum plants, and other dusty zones.**

## General Specifications

**FAN AND FILTER BOX FRAMES:** Constructed by Aluminium profil and corners.

**CASING:** Hot dip galvanized steel and fiber glass.

**FILL:** Heavy duty PVC fill pack.

**FILTER :** Multi special bed air inlet filters .

**FAN:** Balanced forward curved centrifugal fans.

**ELECTROMOTOR:** TEFC, three phase, IP54 or IP55, F class electromotor.



**DAMPER:** air inlet and outlet opposed blade Aluminium profil dampers.

**ACCESSORIES:** Sand trap, FRP hood, FRP doors, backdraft damper, special Nozzels, special pullies.



OMRAN TAHVIEH

Patent No. : 38602922

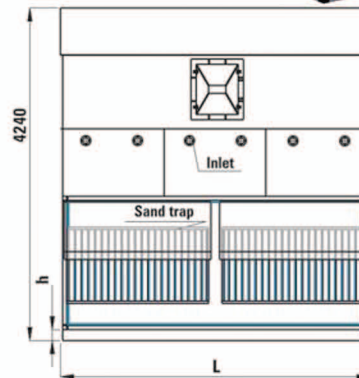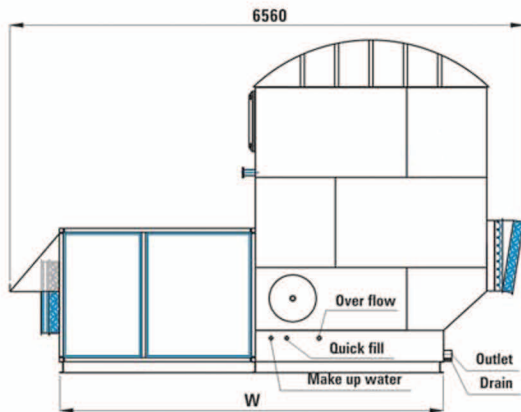


Model	Nominal Tons	Nominal GPM(us)	Electro Motor	L (cm)	W (cm)	h (cm)	Blower	
							Qty.	Dia.
OFCB-IND-DZ-10	10	30	1 × 3/4	50	490	10	1	15"
OFCB-IND-DZ-15	15	45	1 × 1	75	490	10	1	15"
OFCB-IND-DZ-20	20	60	1 × 1 1/2	95	490	10	1	15"
OFCB-IND-DZ-25	25	75	1 × 2	95	490	10	1	18"
OFCB-IND-DZ-30	30	90	1 × 3	95	490	10	1	18"
OFCB-IND-DZ-35	35	105	1 × 3	95	490	10	1	22"
OFCB-IND-DZ-40	40	120	1 × 3	95	490	10	1	22"
OFCB-IND-DZ-50	50	150	1 × 3	95	490	10	1	22"
OFCB-IND-DZ-60	60	180	1 × 4	95	490	10	1	22"
OFCB-IND-DZ-75	75	225	1 × 5.5	120	490	12	1	22"
OFCB-IND-DZ-90	90	270	1 × 7.5	175	490	12	1	22"
OFCB-IND-DZ-105	105	315	1 × 7.5	190	490	12	2	22"
OFCB-IND-DZ-120	120	360	1 × 10	195	490	12	2	22"
OFCB-IND-DZ-140	140	420	1 × 15	215	490	12	2	22"
OFCB-IND-DZ-160	150	480	1 × 10 + 1 × 5.5	295	490	12	3	22"
OFCB-IND-DZ-180	180	540	1 × 10 + 1 × 5.5	300	490	12	3	22"
OFCB-IND-DZ-200	200	600	1 × 10 + 1 × 5.5	335	490	12	3	22"
OFCB-IND-DZ-250	250	750	2 × 10	395	490	14	4	22"
OFCB-IND-DZ-300	300	900	2 × 10 + 1 × 5.5	495	490	14	5	22"
OFCB-IND-DZ-350	350	1050	3 × 10	595	490	14	6	22"
OFCB-IND-DZ-400	400	1200	3 × 10	680	490	14	6	22"
OFCB-IND-DZ-450	450	1350	3 × 10 + 1 × 5.5	740	490	14	7	22"
OFCB-IND-DZ-500	500	1500	4 × 10	790	490	14	8	22"
OFCB-IND-DZ-600	600	1800	4 × 10 + 2 × 5.5	990	490	14	10	22"
OFCB-IND-DZ-700	700	2100	6 × 10	1190	490	14	12	22"
OFCB-IND-DZ-800	800	2400	6 × 10	1360	490	14	12	22"
OFCB-IND-DZ-900	900	2700	6 × 10 + 2 × 5.5	1480	490	14	14	22"
OFCB-IND-DZ-1000	1000	3000	8 × 10	1620	490	14	16	22"
OFCB-IND-DZ-1200	1200	3600	10 × 10	1990	490	14	20	22"



# Plate Heat Exchanger

## Exchanger dimension data

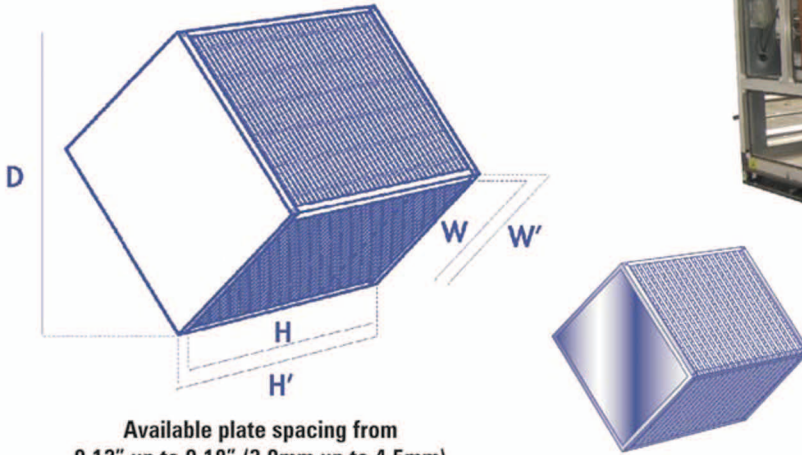

Available plate spacing from 0.12" up to 0.18" (3.0mm up to 4.5mm)

The Omran air to air exchanger is capable of recovering up to 80% of the sensible energy normally exhausted, providing HVAC systems with higher energy efficiency and lower operational costs. This passive heat exchanger has no external power requirements and provides the owner with an economical alternative to more expensive heat recovery methods.

### Advantages

#### FLEXIBILITY:

- Cost effective for any dimension: we manufacture our heat exchanger around your design, not ours.

#### TECHNICAL SUPPORT:

- Several years of experience in research & development in the energy recovery technology.

#### EFFICIENCY:

- Independently tested, and proven to be one of the most efficient heat exchangers on the market.

#### SOFTWARE:

- User friendly software is available to assist during the selection process and give the complete design characteristics.

Model Number	Inside Width W (in/mm)	Overall Width W' (in/mm)	Diagonal D (in/mm)	Inside Height H (in/mm)	Overall Height H' (in/mm)
12S	10-11/16" (272mm)	12-1/4" (311mm)	17-5/16" (440mm)	H' - 3/4" (H' - 19mm)	As your selection
15S	13-11/16" (348mm)	15-1/4" (388mm)	21-9/16" (548mm)		
18S	16-3/4" (426mm)	18-1/4" (464mm)	25-13/16" (656mm)		
24S	21-1/4" (540mm)	24-1/4" (616mm)	34-5/16" (872mm)		
27S	24-1/4" (616mm)	27-1/4" (692mm)	38-9/16" (980mm)		
33S	30-1/4" (769mm)	33-1/4" (845mm)	47-1/16" (1196mm)		
36S	33-7/16" (850mm)	36-7/16" (926mm)	51-1/2" (1308mm)		
42S	39-7/16" (1002mm)	42-7/16" (1078mm)	60" (1524mm)		
48S	45-7/16" (1154mm)	48-7/16" (1231mm)	68-1/2" (1740mm)		

All tolerances are +/- 1/16" (+/- 2mm)

Subject To Modification without notice






### Unit Heater (Hot Water & Steam)

#### FEATURES:

- Axial HDGS or polyamide or Al. fan
- Three or single phase electromotor.
- Steel casing and damper.
- Copper or Steel Coil tube.
- Al. Or Steel or Copper fin.
- Adjustable special damper.
- Low maintenance and installation costs.



OMRAN TAHVIEH

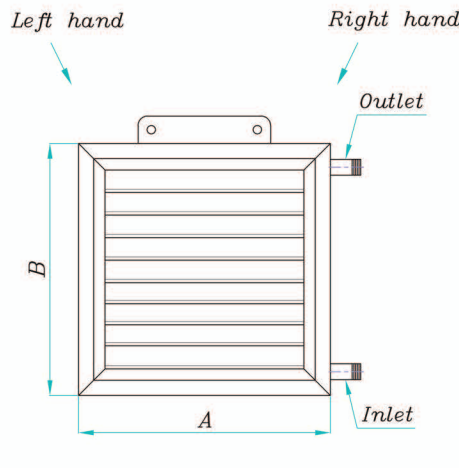

#### TECHNICAL AND CAPACITY DATA


MODEL	ELECTROMOTOR			Ventilator Diameter	Ventilator Model	Damper Dimensions	A	B	C	D	Coil Dimensions	Coil Header	Nominal m <sup>3</sup> /hr
	WATT	R.P.M	PH										
10U 40-1400	135	1400 RPM	Single Phase	30 cm	VIK-30L4S	38×38	52	52	53	42	37×49 cm 2 Rows/8 FPI	1 ¼"	2300
10U 50-1400	160			35 cm	VIK-35L4S	38×38	52	52	53	42	37×49 cm 2 Rows/8 FPI	1 ¼"	3450
10U 80-1400	175			40 cm	VIK-40L4S	45×45	60.5	60.5	53	42	42×56.3 cm 2 Rows/8 FPI	1 ¼"	4000
10U 140-1400	210			45 cm	VIK-45L4S	45×45	60.5	60.5	53	42	47×56.3 cm 2 Rows/8 FPI	1 ¼"	4300
10U 180-1400	360			50 cm	VIK-50T4S	53×53	66.5	66.5	53	42	52×64 cm 2 Rows/8 FPI	1 ¼"	6800
20U 280-1400	2×210			2×45 cm	2×(VIK-45L4S)	105×45	123	60.5	53	42	94×56.3 cm 2 Rows/8 FPI	1 ½"	8600
20U 360-1400	2×360			2×50 cm	2×(VIK-50T4S)	115×53	133	66.5	53	42	105×64 cm 2 Rows/8 FPI	1 ½"	13600
<hr/>													
10U 40-900	90	900 RPM	Single Phase	30 cm	VIK-30L6S	38×38	52	52	53	42	49×37 cm 2 Rows/8 FPI	1 ¼"	1650
10U 50-900	100			35 cm	VIK-35L6S	38×38	52	52	53	42	49×37 cm 2 Rows/8 FPI	1 ¼"	2350
10U 80-900	110			40 cm	VIK-40L6S	45×45	60.5	60.5	53	42	56.3×42 cm 2 Rows/8 FPI	1 ¼"	2800
10U 100-900	110			45 cm	VIK-45L6S	45×45	60.5	60.5	53	42	56.3×47 cm 2 Rows/8 FPI	1 ¼"	3100
10U 130-900	170			50 cm	VIK-50T6S	53×53	66.5	66.5	53	42	64×52 cm 2 Rows/8 FPI	1 ¼"	4300
20U 200-900	2×110			2×45 cm	2×(VIK-45L6S)	105×45	123	60.5	53	42	56.3×94 cm 2 Rows/8 FPI	1 ½"	6200
20U 260-900	2×170			2×50 cm	2×(VIK-50T6S)	115×53	133	66.5	53	42	64×105 cm 2 Rows/8 FPI	1 ½"	8600



# OMSN F.R.P Cooling Tower

## Tower Structure

- Motor (TEFC)
- V-Belt Reducer
- Motor Support
- Fan
- Fan Stack (FRP)
- casing (FRP)
- Louver (FRP)
- Basin (FRP)
- Ladder
- Eliminator
- Nozzle
- Pipes
- Infill
- Safety cage (Optional)

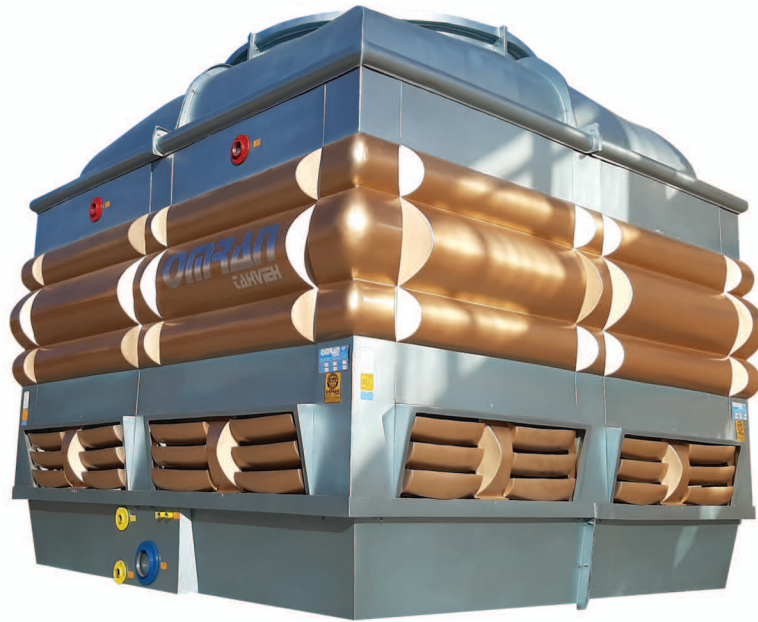

1. Industrial Appearance with reasonable structure OMSN Center Flow Square Type Cooling

Tower series are completely with FRP frame structure.

2. High Efficiency Using high efficiency infill with proper air-water ratio.



3. Low inlet water pressure, Easy to maintain. A new type non clogging nozzle is applied on OMSN series. Even with low inlet water pressure, the water is evenly distributed.

4. Low drift loss. Drift eliminator are used in OMSN series. It greatly reduces drift loss.


5. Low Noise, Energy Saving Using Low Noise Axial Fans which generates at low speeds big air flow quantity with lower noise. As a result the energy consumption is less.

6. Anti-corrosive, Long Life OMSN parts are made of long lasting & anti-corrosive material such as FRP in basin, fan stack and casing. All metal ware are made of Hot Dipped Galvanized Steel, greatly increase the cooling tower life. Optional we can make these parts in SST304 and 316.

7. Modular design.

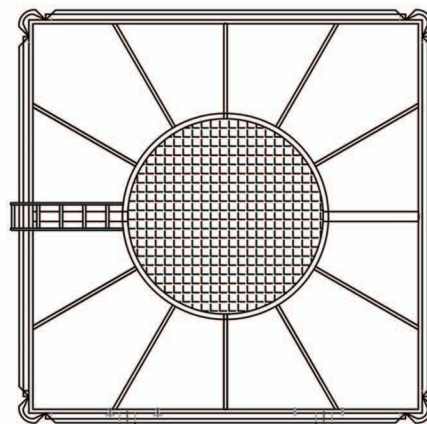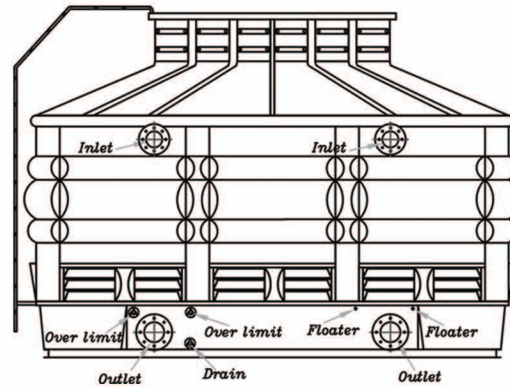


Subject To Modification without notice

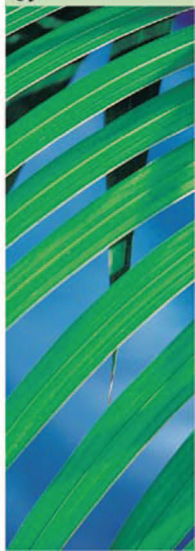



# OACC Air Cooled Condenser

- 950 or 1450 quiet direct driven Fan motors.
- Rugged heavy-gauge galvanized Steel motor mounts / support.
- All fan sections individually baffled with full height partitions, and Clean-out panels.
- Complete Selection of electrical Fan cycling and speed Control options.
- Heavy-gauge galvanized steel Cabinet Construction assembled with Zinc plated huck bolts Supported on heavy duty legs.
- Weather protected motors.
- Basket guard for each fan.
- Fiber glass venturi.
- High efficiency aluminum

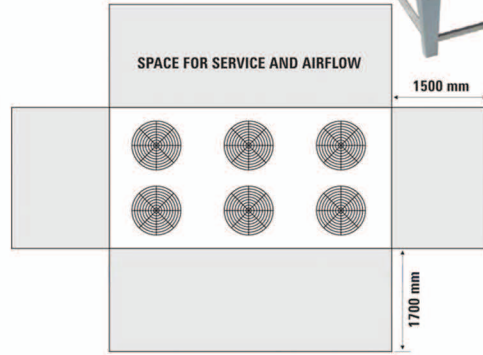

OMRAN TAHVIEH



HEAT REJECTION (MBH)							
MODEL	TD °F						
	10	15	20	25	30	35	40
OACC-045	23	35	48	60	70	81	95
OACC-085	45	68	92	115	135	156	183
OACC-120	67	102	138	173	203	234	275
OACC-180	89	136	184	230	271	311	366
OACC-250	135	205	279	349	410	471	554
OACC-350	176	268	364	455	535	616	723
OACC-450	221	336	457	571	672	734	908
OACC-550	272	413	560	701	825	949	1114
OACC-700	358	542	738	922	1084	1248	1463
OACC-850	451	684	930	1162	1367	1572	1846
OACC-1000	544	825	1122	1402	1650	1897	2227
OACC-1200	626	949	1290	1613	1898	2183	2562

All ratings are based on 125 °F condensing temp. 95 °F entering air temp. At sea level.

PHYSICAL DATA									
MODEL	PROPELLER FAN PERFORMANCE				COIL*			REFRIGERANT** CAPACITY R-22	
	NO.	DIAMETER INCH	RPM	TOTAL CFM	NO.	ROWS DEEP	FACE AREA ft'	CHARGE kg	PUMP DOWN kg
OACC-045	1	24	950	3400	1	3	7	3	9
OACC-085	1	30	950	7200	1	3	12	5	15
OACC-120	2	30	950	10800	1	3	18	7	22
OACC-180	3	30	950	14400	1	3	24	9	32
OACC-250	3	30	950	21900	1	3	36	13	47
OACC-350	4	30	950	28800	2	3	47	18	61
OACC-450	5	30	950	36000	2	3	59	22	73
OACC-550	6	30	950	43800	2	3	73	27	93
OACC-700	8	30	950	57600	4	3	96	35	123
OACC-850	10	30	950	72000	4	3	121	44	152
OACC-1000	12	30	950	87600	4	3	146	53	187
OACC-1200	12	30	950	84000	4	4	146	70	245

ELECTERICAL DATA						
MODEL	ELECTERIC MOTOR					UNIT
	NO×HP	RPM	FULL LOAD AMPS	LOCKED ROTOR AMPS	WEIGHTS NO×(kg)	FULL LOAD AMPS
OACC-045	1×0.75	950	1.7	8.5	1×9	1.7
OACC-085	1×1.5	950	3.2	16	1×13	3.2
OACC-120	2×1.5	950	3.2	16	2×13	6.4
OACC-180	2×1.5	950	3.2	16	2×13	6.4
OACC-250	3×1.5	950	3.2	16	3×13	9.6
OACC-350	4×1.5	950	3.2	16	4×13	12.8
OACC-450	5×1.5	950	3.2	16	5×13	16.0
OACC-550	6×1.5	950	3.2	16	6×13	19.0
OACC-700	8×1.5	950	3.2	16	8×13	25.0
OACC-850	10×1.5	950	3.2	16	10×13	32.0
OACC-1000	12×1.5	950	3.2	16	12×13	35
OACC-1200	12×1.5	950	3.2	16	12×13	35



# Packaged Industrial Cooler

## Technical Descriptions:


- Industrial forward curve centrifugal fan with several fan speed and motor size based on external static pressure.
- Statically and dynamically balanced fans.
- Fan housing and impeller manufactured by hot dip galvanized steel sheet.
- Non corrosive F.R.P basin.
- Aluminum extruded profile framing with P.V.C corners.
- Hot deep galvanized panels.
- Washable Aluminum filter for Dust .
- Single or three phase electro motor 50 Hertz , Ip54 .
- Up or down or front discharge air delivery.
- As your request straw or cellulose pads would be ordered.
- Polyethylene insulation



TYPE	MODEL	CAPACITY		FAN	ELECTROMOTOR		DIMENSIONS			CONNECTION	
		AIR FLOW	HEATING	SIZE	POWER	SPEED	LENGHT	WIDTH	HIEGHT	MAKE UP	HEATING COIL
		m <sup>3</sup> /hr	Btu/hr	In.	HP	RPM	mm	mm	mm	In.	In.
A	OEC-7000	7000	-	12-12	1	1400	1000	1000	940	3/8	-
	OEC-10000	10000	-	15-15	1.5		1150	1000	1090	3/8	-
	OEC-15000	15000	-	18-13	3		1150	1150	1390	1/2	-
	OEC-20000	20000	-	18-18	4		1350	1150	1540	1/2	-
	OEC-25000	25000	-	20-15	5.5		1250	1600	1510	1/2	-
	OEC-30000	30000	-	22-15	7.5		1400	1750	1590	1/2	-
	OEC-35000	35000	-	22-15	10		1450	1750	1590	1/2	-
	OEC-40000	40000	-	25-20	15		1700	1750	2180	1/2	-
B	OECH2-7000	7000	162000	12-12	1	1400	1000	1000	1190	3/8	1
	OECH2-10000	10000	240000	15-15	1.5		1150	1000	1340	3/8	1
	OECH2-15000	15000	320000	18-13	3		1150	1150	1640	1/2	1 1/4
	OECH2-20000	20000	440000	18-18	4		1350	1150	1790	1/2	1 1/4
	OECH2-25000	25000	550000	20-15	5.5		1250	1600	1760	1/2	1 1/2
	OECH2-30000	30000	660000	22-15	7.5		1400	1750	1850	1/2	1 1/2
	OECH2-35000	35000	772000	22-15	10		1450	1750	1850	1/2	1 1/2
	OECH2-40000	40000	880000	25-20	15		1700	1750	2460	1/2	1 1/2

## NOTICE:

"A" Type is industrial cooler without heating coil and "B"Type industrial cooler with one Row heating coil and "C"Type with Tow Row heating coil. As your request industrial cooler with other capacities would be signed and ordered.

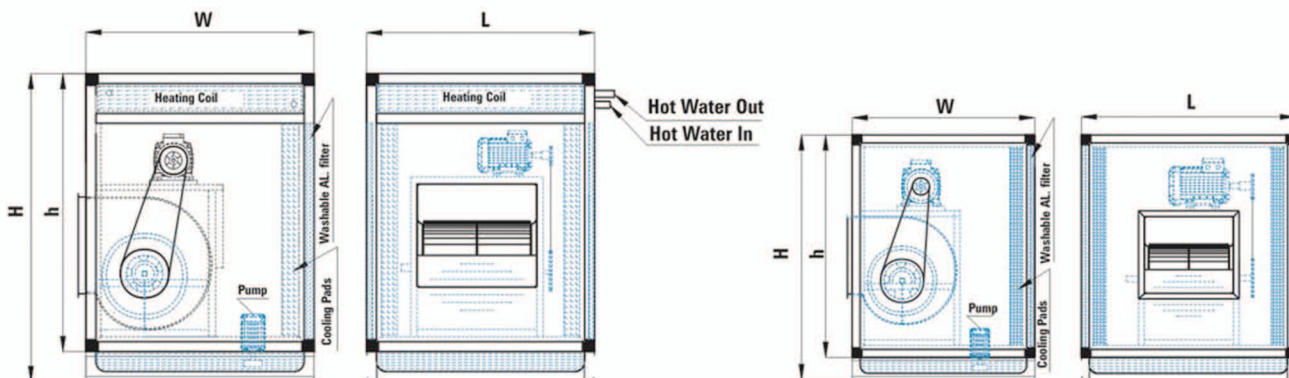



# ZENT (OZ Series)

### Advantages of Omran Tahviah Zents:

- Elimination of room radiators: Saving serviceable area.
- Elimination of horizontal supply and return piping: Saving of initial cost and future maintenance.
- Simple maintenance: No need for specialist service - man.
- Increasing the height of unit and decreasing the sur face are Less occupation area.
- Adjustable summer and winter damper: Easy to change cooling - heating system and possibility of humidification in winter.
- Low noise fan.
- Washable Aluminum filters: Clean air and high efficiency of heating coil.
- Mounted coil inside the unit: Higher heating efficiency, protecting the coil from damage.
- Bypass valve: Control of humidity.
- Fiber glass (FRP) basin: Long life of unit.
- (OPB) opposed blade damper.
- Aluminium profile frame.



OMRAN TAHVIEH

### COMMERCIAL HEAVY DUTY ZENT SPECIFICATION

MODEL	CAPACITY		FAN	OUTLET DIMENSION	ELECTRO- MOTOR			T.S PRESSURE	DIMENSIONS			CONNECTION		APPROX-WEIGHT		
	AIR FLOW	HEATING	∅	a' b	POWER	SPEED	PHASE	Ht	LENGHT	WIDTH	HIEGHT	COIL	FLOATER	SHIPPING	OPERATING	
	Cfm	Btu/hr	In.	Cm	HP	RPM	NO.	Mm-H <sub>2</sub> O	cm			Inches		Kg		
OZ 15-50-CM-HD	1500	50000			1/2	1400&900	SINGLE	19						180	290	
OZ 20-70-CM-HD	2000	70000	12	31 × 38.5	3/4			21	90	70	190	1	3/8	182	292	
OZ 27-75-CM-HD	2700	75000			3/4			23							185	295
OZ 32-85-CM-HD	3200	85000			3/4		19							220	320	
OZ 45-140-CM-HD	4500	140000	15	36 × 39	1 1/2	1400	THREE	23	110	85	210	1	3/8	225	325	
OZ 60-160-CM-HD	6000	160000			3			20							230	330
OZ 70-190-CM-HD	7000	190000			3			20							460	660
OZ 80-230-CM-HD	8000	230000	20	48 × 60	3		25	172	120	225	1 1/4	1/2	465	665		
OZ 90-280-CM-HD	9000	280000			4		27							470	670	
OZ 100-320-CM-HD	10000	320000			5 1/2	1400	THREE	30						545	785	
OZ 120-360-CM-HD	12000	360000	22	62.5 × 68	5 1/2			31	172	120	270	1 1/4	1/2	550	790	
OZ 140-400-CM-HD	14000	400000			7 1/2			35							555	795
OZ 160-440-CM-HD	16000	440000			7 1/2		35							645	960	
OZ 175-470-CM-HD	17500	470000	25	62 × 73	10		40	300	150	215	1 1/2	1/2	655	970		
OZ 190-500-CM-HD	19000	500000			10		42							660	975	
OZ 200-570-CM-HD	20000	570000			15		40							790	1200	
OZ 215-600-CM-HD	21500	600000	28	64 × 87	15		45	330	150	215	1 1/2	3/4	792	1202		
OZ 230-700-CM-HD	23000	700000			15		50							796	1205	
OZ 240-730-CM-HD	24000	730000			15		50							900	1400	
OZ 250-750-CM-HD	25000	750000	30	65 × 93	15		55	360	150	231	1 1/2	3/4	905	1405		
OZ 260-800-CM-HD	26000	800000			20		60							915	1415	






# Packaged Industrial Cooler-Heater (Indirect Fire)

## Technical Descriptions:

- Industrial forward curve centrifugal fan with several fan speed and motor size based on external static pressure.
- Statically balanced fans.
- Fan housing and impeller manufactured by hot dip galvanized steel sheet.
- Non corrosive F.R.P basin.
- Aluminum extruded profile framing with P.V.C corners.
- Hot deep galvanized panels.
- Washable Aluminum filter for Dust.
- Single or three phase electro motor 50 Hertz, IP54, Up or down or front discharge air delivery As your request, straw or cellulose pads would be ordered.
- Polyethylene insulation.
- Indirect-fire heater type.
- Oil or gas burner.



TYPE	INDIRECT FIRE TYPE	CAPACITY		FAN	ELECTRO MOTOR		DIMENSIONS			CONNECTION
		Air Flow	Heating	Size	Power	Speed	Length	Width	Height	Make Up
		m <sup>3</sup> /hr	BTU/hr	In	HP	RPM	mm	mm	mm	In
D	OECIND-7000	7000	170000	12-12	1	1400	1000	1750	1190	3/8
	OECIND-10000	10000	250000	15-15	1.5		1150	1750	1340	3/8
	OECIND-15000	15000	320000	18-13	3		1150	1900	1640	1/2
	OECIND-20000	20000	440000	18-18	4		1350	1900	1790	1/2
	OECIND-25000	25000	550000	20-15	5.5		1250	2350	1760	1/2
	OECIND-30000	30000	660000	22-15	7.5		1400	2200	1850	1/2
	OECIND-35000	35000	772000	22-15	10		1450	2200	1850	1/2
	OECIND-40000	40000	880000	25-20	15		1700	2500	2180	1/2

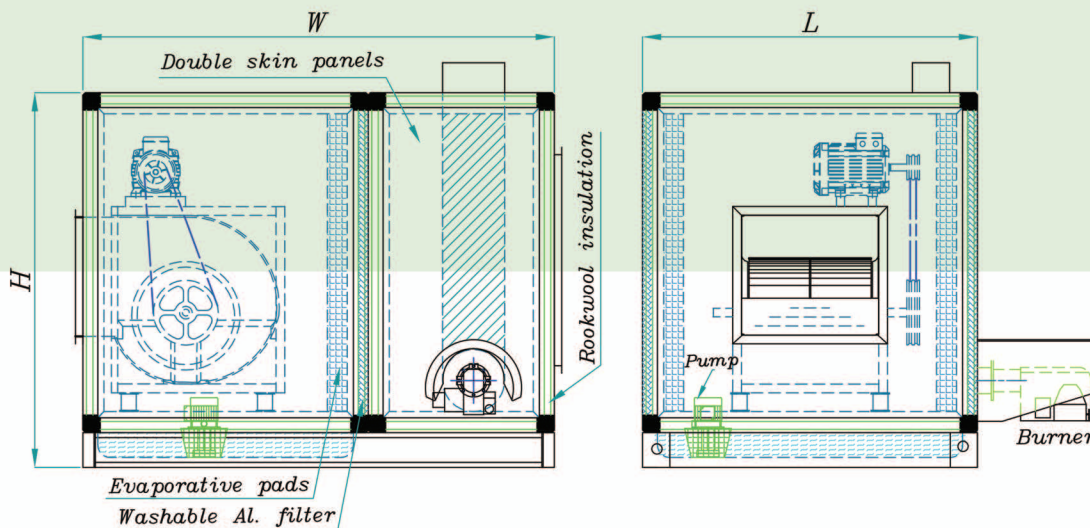

Subject To Modification without notice



## Packaged Semi-Industrial Cooler

### Technical Descriptions:

- FRP Casing and basin
- Anti Corrosive
- Anti U.V.
- Initial Insulation
- Special design
- Heating System (optional)
- Special Painting
- High Performance
- Low Water Consumption
- Special Bases
- Hybrid Applicable
- Anti Corrosive Coated Blower
- FRP Housing (optional)
- Aerodynamic Casing
- Portable (optional)



OECC



OECC




OECC

OMRAN TAHVIEH

## Air Washer Cleaner Cooler

### Technical Descriptions:

- FRP Casing and basin
- Anti Corrosive
- Anti U.V.
- Initial Insulation
- Lovely and special design
- Lovely and special paint
- High performance
- Cellulose evaporative pads
- Low water consumption
- Heating system (Optional)
- Hybrid applicable
- Roll special filter
- Flexible duct connector






# OACF Centrifugal Air Cooled Condensers

Galvanized steel, angular steel cabinet construction Removable access panels Galvanized steel fan housings and wheels. Fan wheels keyed to fan shaft. Belt drive fan motors. Weather protected motors with top end rain shields and shaft moisture slingers. High efficiency aluminum or copper fin coils Adjustable motor bases and drives.



OACF MODEL No.	R-22 TOTAL HEAT REJECTION (BTU/HR)					
	°F. (°C) TEMPERATURE DIFFERENCE = CONDENSING TEMPERATURE MINUS AMBIENT TEMPERATURE					
	1(.6)	10(6)	15(8)	20(11)	25(14)	30(17)
103	1800	18000	27000	36000	45000	54000
104	2730	27300	41000	54600	68300	82000
106	3900	39000	58500	78000	97500	117000
108	5200	52000	78000	104000	130000	156000
111	6930	69300	104000	138600	173300	208000
214	8860	88600	133000	177300	221600	266000
217	10500	105000	157500	210000	262500	315000
222	13030	130300	195500	260600	325800	391000
228	16360	163600	245500	327300	409100	491000
237	21460	214600	321900	429200	536600	643800
141	25200	252000	378000	504000	630000	756000
150	28980	289800	434700	579600	724500	869400
164	36580	365800	548700	731600	914500	1097400

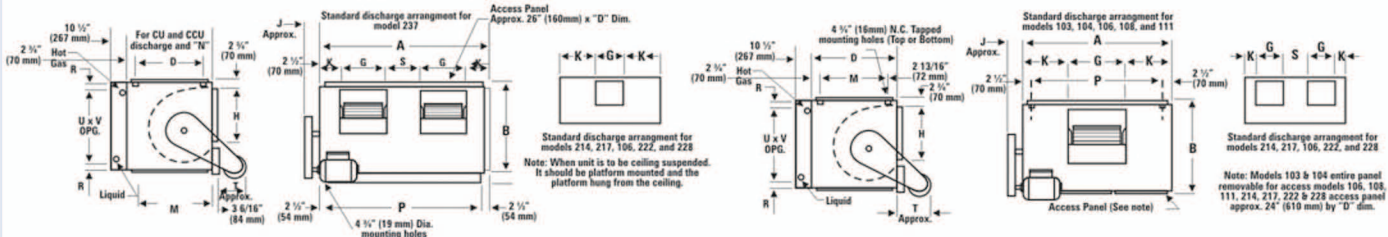

MODEL NO. OACF		A	B	D	G	H	J	K	M	N	P	R	S	T	U	V	No. of FACE TUBES	REFRIGERANT* CHARGE 6 ROW COIL				SHIPPING WEIGHT	
																		R-12		R-22		Lbs.	Kg.
																		Lbs.	Kg.	Lbs.	Kg.		
103	ins	34	22 3/4	21 3/4	11 3/4	10 1/4	6 1/2	11 1/8	16 1/8	-	28 1/2	1 1/2	-	15	18	30	12	3.31	1.50	2.98	1.35	343	156
	mm	864	578	553	299	260	165	283	410	-	724	38	-	381	457	762							
104	ins	40	25 3/4	24 3/4	12 1/4	13 1/2	6 1/2	13 7/8	19 1/8	-	34 1/2	1 1/2	-	15	21	36	14	4.50	2.04	4.05	1.84	431	196
	mm	1016	654	629	311	343	165	352	486	-	876	38	-	381	533	914							
106	ins	50	29	28	17 1/4	15 7/8	6 1/2	16 3/8	22 3/8	-	44 1/2	1 1/2	-	16	24	45	16	5.85	2.66	5.27	2.39	600	272
	mm	1270	737	711	438	403	165	416	568	-	1130	38	-	406	610	1143							
108	ins	48	37 3/4	36 3/4	21 1/8	19 3/8	8	13 3/8	31 1/8	-	42 1/2	1 1/2	-	18	33	44	22	7.88	3.58	7.09	3.22	806	366
	mm	1219	959	934	537	492	203	340	791	-	1080	38	-	457	838	1118							
111	ins	63	37 3/4	36 3/4	23 1/4	21 5/8	8	19 7/8	31 1/8	-	57 1/2	1 1/2	-	18	33	58	22	10.28	4.67	9.25	4.20	996	452
	mm	1600	959	934	591	549	203	505	791	-	1461	38	-	457	838	1473							
214	ins	78	37 3/4	36 3/4	19	17 7/8	8	10	31 1/8	-	72 1/2	1 1/2	20	21	33	74	22	13.02	5.91	11.72	5.32	1171	531
	mm	1981	959	934	483	454	203	254	791	-	1842	38	508	533	838	1880							
217	ins	93	37 3/4	36 3/4	21 1/8	19 3/8	8	12 3/4	31 1/8	-	87 1/2	1 1/2	25 3/8	21	33	88	22	14.20	6.45	12.90	5.86	1393	632
	mm	2362	959	934	537	492	203	324	791	-	2223	38	645	533	838	2235							
222	ins	97	44 3/4	43 3/4	23 1/4	21 5/8	9	12 5/8	38 1/8	-	91 1/2	2	25 1/4	21	39	92	26	17.46	7.93	15.86	7.20	1714	778
	mm	2464	1137	1111	591	549	229	321	968	-	2324	51	641	533	991	2337							
228	ins	120	44 3/4	43 3/4	28 1/4	26 1/2	9	15 7/8	38 1/8	-	114 1/2	2	31 3/4	23	39	116	26	21.55	9.78	19.59	8.89	2163	981
	mm	3048	1137	1111	718	673	229	403	968	-	2908	51	807	584	991	2946							
237	ins	122 1/8	57 3/8	45 5/8	31 1/2	28 3/4	11 1/2	15 1/8	39 1/2	11 3/4	117 7/8	2	29	25	51	116	34	28.72	13.04	26.10	11.85	3420	1551
	mm	3102	1457	1159	800	730	292	384	1003	299	2994	51	737	635	1295	2946							
141	ins	122 1/8	65 5/8	59 1/8	46 3/8	43 1/4	11 1/2	37 7/8	53	6 1/2	117 7/8	1 3/4	-	25	60	116	40	34.29	15.57	31.15	14.14	3500	1588
	mm	3102	1667	1502	1178	1099	292	962	1346	165	2994	45	-	635	1524	2946							
150	ins	122 1/8	75 3/8	66 5/8	51 1/2	47 1/4	11 1/2	35 7/8	60 1/2	8 3/4	117 7/8	2	-	25	69	116	46	41.28	18.74	38.05	17.27	4500	2041
	mm	3102	1915	1692	1308	1200	292	899	1537	222	2994	51	-	635	1753	2946							
164	ins	122 1/8	93 3/8	72 5/8	56 3/4	52 3/8	11 1/2	32 5/8	66 1/2	20 3/4	117 7/8	2	-	25	87	116	58	53.31	24.20	47.98	21.78	5900	2676
	mm	3102	2372	1845	1442	1330	292	829	1689	527	2994	51	-	635	2210	2946							

\* For R502 multiply change in lbs. By 0.93 and for R500 by 0.88 For winter change, multiply by 6.65.

\*\* For filter section dimensions refer to page 7.

Subject To Modification without notice




# OADF Direct Drive Dry Type Fluid Coolers

**Air Cooled Models from 200 MBH to 2,000 MBH  
One to Six fan Units Glycol Selection**

- Heavy gauge galvanized steel casing with zinc plated nuts and bolts
- Die - formed legs
- High efficiency coils with aluminum fins hydraulically bonded to copper tubing.
- Direct drive fan motors.
- Motors are weather protected by top end rain shields and shaft moisture slingers.



OMRAN TAHVIEH

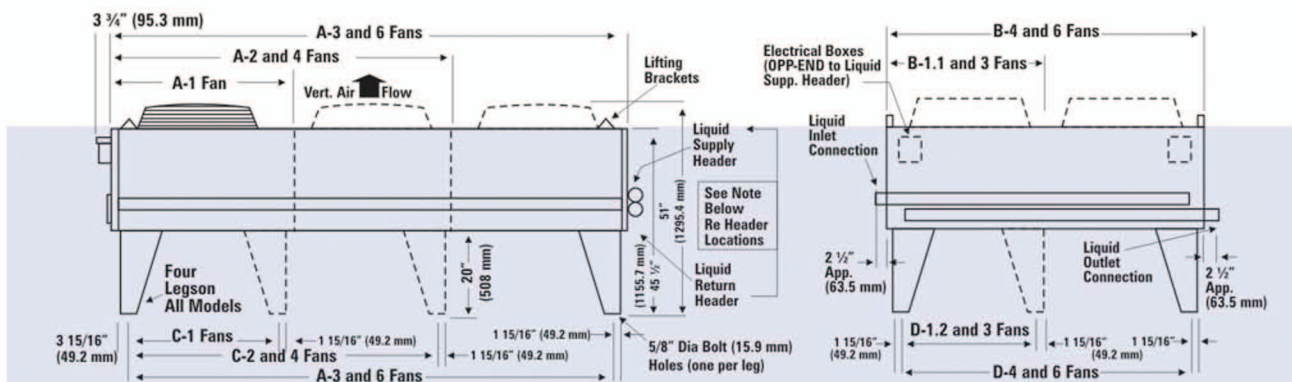

**NOTE:** Headers can be located at either end of unit.

Whether both supply and return headers are located same end or opposite end depends on coil rows and circuiting used.

OADF MODEL No.	A		B		C		D		INTERNAL VOLUME		NUMBER OF FACE TUBE ROWS	FAN DATA			SHIPPING WEIGHT	
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	U.S. * GALLONS WATER	LITRES*		NO.	TOTAL CFM	TOTAL M/S	Pounds	Kg
1039	43	1092	48 1/8	1222	36	914	41 1/8	1045	3 1/2	13.3	30	1	7370	3.48	320	145
1052	43	1092	48 1/8	1222	36	914	41 1/8	1045	4 1/2	17.0	30	1	7050	3.33	355	161
1060	50	1270	48 1/8	1222	43	1092	41 1/8	1045	5 1/2	20.8	30	1	7380	3.48	390	177
1075	50	1270	48 1/8	1222	43	1092	41 1/8	1045	6 1/2	24.6	30	1	7150	3.37	430	195
2075	83 1/8	2111	48 1/8	1222	76 1/8	1934	41 1/8	1045	6	22.7	30	2	14740	6.96	580	263
2100	83 1/8	2111	48 1/8	1222	76 1/8	1934	41 1/8	1045	8	30.3	30	2	14100	6.65	645	293
2120	97 1/8	2467	48 1/8	1222	90 1/8	2289	41 1/8	1045	10	37.9	30	2	14760	6.97	725	329
2150	97 1/8	2467	48 1/8	1222	90 1/8	2289	41 1/8	1045	12	45.4	30	2	14300	6.75	800	363
3114	123 1/4	3131	48 1/8	1222	116 1/4	2953	41 1/8	1045	9	34.0	30	3	22110	10.43	870	395
3152	123 1/4	3131	48 1/8	1222	116 1/4	2953	41 1/8	1045	12	45.4	30	3	21150	9.98	965	438
3180	144 1/4	3664	48 1/8	1222	137 1/4	3483	41 1/8	1045	14 1/2	54.9	30	3	22140	10.45	1080	490
3225	144 1/4	3664	48 1/8	1222	137 1/4	3483	41 1/8	1045	18	68.1	30	3	21450	10.12	1200	544
4150	83 1/8	2111	93 1/8	2365	76 1/8	1934	86 1/8	2188	12 1/2	47.3	60	4	29480	13.91	1075	488
4200	83 1/8	2111	93 1/8	2365	76 1/8	1934	86 1/8	2188	16 1/2	62.3	60	4	28200	13.31	1200	544
4240	97 1/8	2467	93 1/8	2365	90 1/8	2289	86 1/8	2188	19 1/2	73.8	60	4	29520	13.93	1340	608
4300	97 1/8	2467	93 1/8	2365	90 1/8	2289	86 1/8	2188	24	91.0	60	4	28600	13.5	1500	680
6225	123 1/4	3131	93 1/8	2365	116 1/4	2953	86 1/8	2188	18	68.1	60	6	44220	20.87	1600	726
6300	123 1/4	3131	93 1/8	2365	116 1/4	2953	86 1/8	2188	24	91.0	60	6	42300	19.96	1850	839
6360	144 1/4	3664	93 1/8	2365	137 1/4	3483	86 1/8	2188	29	109.8	60	6	44280	20.9	2000	907
6450	144 1/4	3664	93 1/8	2365	137 1/4	3483	86 1/8	2188	36	136.3	60	6	42900	20.25	2200	998

\* Headers not included. Motors are available for 208-230/1/60-1 HP, 208-230/3/60 - 1 1/3 HP, 575/3/60 - 1 1/4 HP, 380/3/50 -1 1/2 HP Contact OMRAN Refrigeration for special requirements.





## Air Cooled Mini Chiller

### Technical Specifications

- Hermetic type compressors with famous brand.
- Brazed plate Evaporator
- Air cool condenser
- Single phase electrical power 50/1/220.
- Refrigerants are R22, R407C, R134a according to customer requirements.
- The casing, structure and chassis are made of Carbon steel sheet with electrostatic or epoxy paint coating.
- Electro fan of condenser is Axial and LOW NOISE , IP54 , 50/1/220
- The condenser coil is made of copper tubes with aluminum , copper or coated fin .
- Condenser and evaporator coils are tested by extra pressure .
- Elastomeric insulation for suction lines and evaporator .
- Units are factory charged by refrigerant gas and oil .





## OVTL - Open Cooling Tower (Low Profile)

### General Description

Open Circuit Cooling Towers with centrifugal fans, deliver fully rated thermal performance over a wide range of flow and temperature requirements. This type of cooling towers can be installed indoors and can accommodate limited ceiling or enclosure heights. Cooling tower with centrifugal fans minimize sound levels and installation costs, provides year round operating reliability, and simplifies maintenance requirements.

Cooling Towers provide an answer to the growing need to save water and energy and help protect the environment by providing the highest system efficiency.



OMRAN TAHVIEH

### Key Features

- Suitable for indoor and outdoor installations
- Suitable for high temperature applications
- Low sound
- Single side air inlet
- Low energy consumption

- Low installed cost
- Easy maintenance
- Reliable year - round operation
- Long service life
- Suitable for locations with limited ceiling or enclosure heights and roof top installations



### OVTL 039 G-OVTL 137 M

Model OVTL	Operating Weight (kg)	Shipping Weight	Fan Motor (kW)	Fluid Inlet ND (mm)	Fluid Outlet ND (mm)	Make Up ND (mm)	A (mm)	H (mm)	L1 (mm)	L2 (mm)	W (mm)
OVTL 039-G	1200	720	(1) 2,2	(1) 100	(1) 100	25	75	1560	3350	1820	1250
OVTL 045-H	1230	750	(1) 4,0	(1) 100	(1) 100	25	75	1560	3350	1820	1250
OVTL 052-H	1260	780	(1) 4,0	(1) 100	(1) 100	25	75	1785	3350	1820	1250
OVTL 059-H	1290	810	(1) 4,0	(1) 100	(1) 100	25	75	1990	3350	1820	1250
OVTL 059-J	1310	830	(1) 5,5	(1) 100	(1) 100	25	75	1785	3350	1820	1250
OVTL 066-J	1320	840	(1) 5,5	(1) 100	(1) 100	25	75	1990	3350	1820	1250
OVTL 072-K	1330	850	(1) 7,5	(1) 100	(1) 100	25	75	1990	3350	1820	1250
OVTL 076-J	1720	1010	(1) 5,5	(1) 150	(1) 150	25	105	1990	4560	2730	1250
OVTL 079-K	1410	930	(1) 7,5	(1) 100	(1) 100	25	75	2480	3350	1820	1250
OVTL 082-K	1740	1030	(1) 7,5	(1) 150	(1) 150	25	105	1990	4560	2730	1250
OVTL 086-L	2050	1120	(1) 11,0	(1) 150	(1) 150	25	105	1560	5480	3650	1250
OVTL 094-M	2060	1130	(1) 15,0	(1) 150	(1) 150	25	105	1560	5480	3650	1250
OVTL 095-K	1850	1140	(1) 7,5	(1) 150	(1) 150	25	105	2480	4560	2730	1250
OVTL 103-K	2150	1220	(1) 7,5	(1) 150	(1) 150	25	105	1990	5480	3650	1250
OVTL 116-L	2180	1250	(1) 11,0	(1) 150	(1) 150	25	105	1990	5480	3650	1250
OVTL 126-L	2320	1390	(1) 11,0	(1) 150	(1) 150	25	105	2480	5480	3650	1250
OVTL 126-M	2190	1260	(1) 15,0	(1) 150	(1) 150	25	105	1990	5480	3650	1250
OVTL 137-M	2330	1400	(1) 15,0	(1) 150	(1) 150	25	105	2480	5480	3650	1250

### OVTL 139 L- OVTL 272 P

Model OVTL	Operating Weight (kg)	Shipping Weight	Fan Motor (kW)	Fluid Inlet ND (mm)	Fluid Outlet ND (mm)	Make Up ND (mm)	A (mm)	H (mm)	L1 (mm)	L2 (mm)	W (mm)
OVTL 139-L	3000	1560	(1) 11,0	(1) 200	(1) 200	50	130	1560	4560	2730	2400
OVTL 152-M	3010	1570	(1) 15,0	(1) 200	(1) 200	50	130	1560	4560	2730	2400
OVTL 171-L	3100	1670	(1) 11,0	(1) 200	(1) 200	50	130	1990	4560	2730	2400
OVTL 185-M	3170	1740	(1) 15,0	(1) 200	(1) 200	50	130	1990	4560	2730	2400
OVTL 198-N	3190	1760	(1) 18,5	(1) 200	(1) 200	50	130	1990	4560	2730	2400
OVTL 209-O	3200	1770	(1) 22,0	(1) 200	(1) 200	50	130	1990	4560	2730	2400
OVTL 215-N	3380	1950	(1) 18,5	(1) 200	(1) 200	50	130	2480	4560	2730	2400
OVTL 225-O	4000	2080	(1) 22,0	(1) 200	(1) 200	50	130	1990	5480	3650	2400
OVTL 227-O	3400	1970	(1) 22,0	(1) 200	(1) 200	50	130	2480	4560	2730	2400
OVTL 238-N	4110	2210	(1) 18,5	(1) 200	(1) 200	50	130	2480	5480	3650	2400
OVTL 245-P	4080	2180	(1) 30,0	(1) 200	(1) 200	50	130	1990	5480	3650	2400
OVTL 272-P	4310	2410	(1) 30,0	(1) 200	(1) 200	50	130	2480	5480	3650	2400

Subject To Modification without notice



# Classic Fan Coils

## SPECIFICATIONS

### UNIT CONSTRUCTION

These fan coil unit consists of coil, motor/blower assembly Filter, Multi speed switch, connections and a drain pan securely mounted on heavy gauge steel housing. Exposed fan coil unit's steel sheet panels are pre washing and coated by the powder coating process. Access to the blower assembly is provided through the removable cover from where the complete fan/motor deck can be removed for servicing.

### BLOWER ASSEMBLY

The direct drive blower motor assembly is easily accessible for complete servicing after removal of fan deck from the unit. The blower wheels are large in diameter and are of the forward curved design. Constructed of Plastic or Aluminum, they are balanced for quiet and smooth performance.

### MOTORS

Motors are permanent split capacitor type with multi speed tapped windings and thermal protector. The bearings are of sleeve type.




### COILS

Coils are Multi rows deep and are manufactured from 5/8"OD copper tubing with aluminum fins mechanically bonded to the tubing. Coils are provided with capillary tube for expansion. All coils are factory tested at 300 psig.

### DRAIN PAN

The condensate drain pan is fabricated of heavy gauge galvanized steel. The drain pan could coated by FRP (Fiberglass) or zinc - rich coating ( optional ).

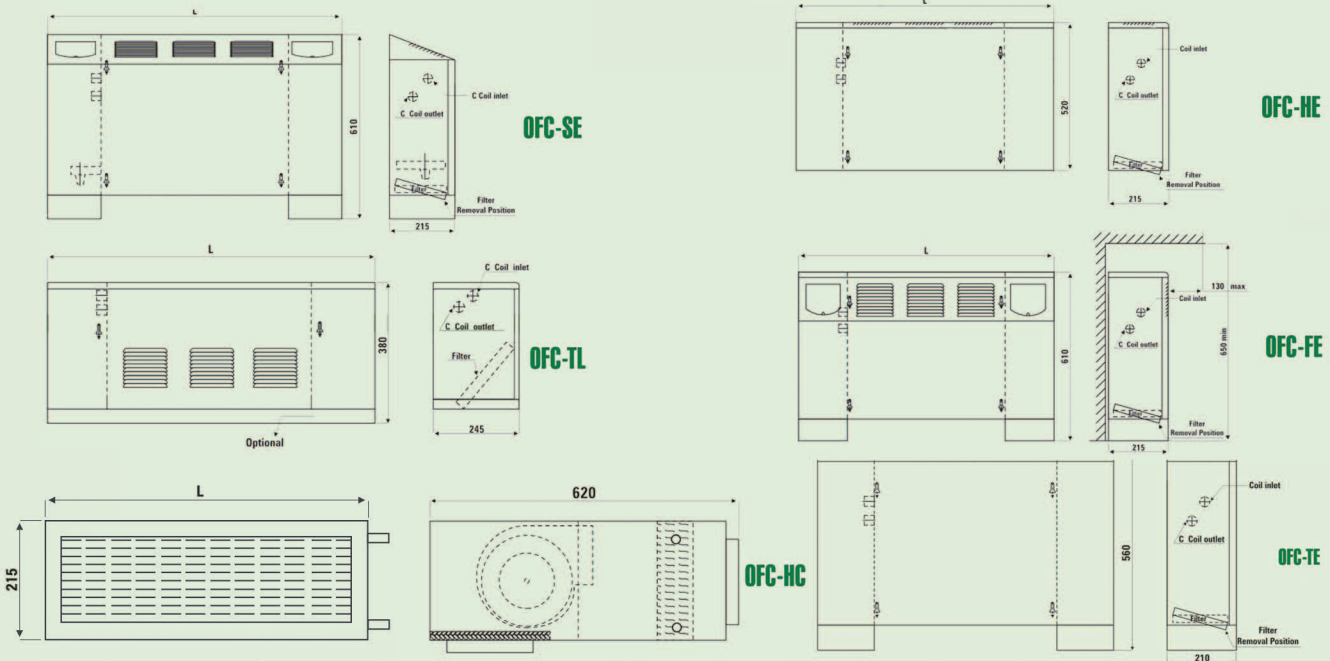

FAN -COILS MODEL	L (mm)	Conn. Size of coil (in.) NPS	ELECTRO MOTOR		Nominal air flow (cfm)
			No. of motor × nominal power(w)	Approximate high speed (rpm)	
OFC-TE*-02	900	3/4"	1 × 30 W	1100	200
OFC-TE*-03	1080	3/4"	1 × 30 W	1100	300
OFC-TE*-04	1260	3/4"	1 × 30 W	1100	400
OFC-TE*-06	1440	3/4"	1 × 30 W	1100	600
OFC-TE*-08	1620	3/4"	2 × 30 W	1100	800
OFC-TE*-10	1800	3/4"	2 × 30 W	1100	1000
OFC-TE*-12	1980	3/4"	2 × 30 W	1100	1200
OFC-HC-200	600	3/4"	1 × 30 W	1100	200
OFC-HC-300	780	3/4"	1 × 30 W	1100	300
OFC-HC-400	960	3/4"	1 × 30 W	1100	400
OFC-HC-600	1140	3/4"	2 × 30 W	1100	600
OFC-HC-800	1320	3/4"	2 × 30 W	1100	800
OFC-HC-1000	1670	3/4"	2 × 30 W	1100	1000
OFC-HC-1200	2010	3/4"	2 × 30 W	1100	1200

\* TE: Top discharge exposed  
FE: Front discharge exposed  
SE: Slant top discharge exposed

HE: Horizontal exposed  
HC: Horizontal concealed  
TL: Lo - Boy

Subject To Modification without notice





# Ducted Fan Coils

**OMRAN TAHVIEH (ODFC) INCLUDED :**

Condensate drain pan is constructed of heavy gauge galvanized sheet metal. The condensate drain outlet is up to 3/4 inch O.D.

**Farming**

Unit frames are fabricated with diecasted corners and Aluminum extruded profiles. Unit frames are completely stable and demountable.

**Casing**

Unit casing and panels are single skinned and fabricated with (1.25~1.5mm) wall thickness hot dip galvanized steel gasketed and air-tightened.



**Thermal Insulation**


10mm high quality, poly roll thermal and noise and moisture insulator.

**Coils**

Coils are constructed of 5/8 inch O.D. Copper tubes with waffled and rippled edge aluminum or copper fins mechanically bonded to the tubes. All coils are leak tested with 300 psig air in an illuminated water test tank.



All DX Coils are evacuated and backfilled with 5 psig dry nitrogen to assembly on the units.

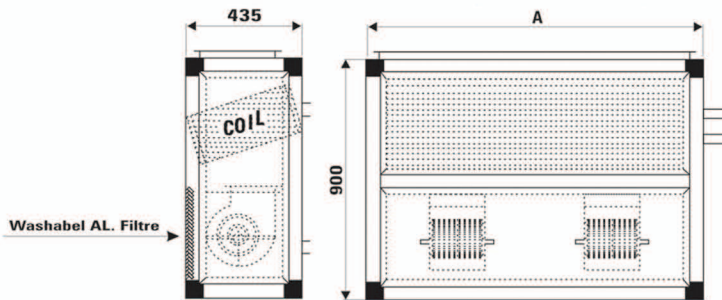

**Bed Filter**


Permanent washable flat type air filter, constructed with Corrugated mesh aluminum expanded sheet.

**Fans**

The fans are direct driven, centrifugal, forward curved, double width wheels. Blower housings are galvanized steel sheet with specially rolled perimeter welded to add rigidity.

**Motors**

Motors are variable speed by speed controller, single phase - 50HZ, 220V, IP 55, Fitch Bach type. (Optional)

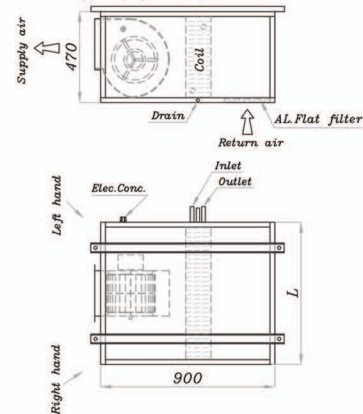

OMRAN TAHVIEH



Subject To Modification without notice

Model	Nominal CFM	A (mm)	Pipe Size (in.)
ODFC-C0600	600	650	3/4
ODFC-C0800	800	760	3/4
ODFC C1000	1000	875	3/4
ODFC-C1200	1200	985	1
ODFC-C1400	1400	1100	1
ODFC-C1600	1600	1210	1
ODFC-C1800	1800	1375	1
ODFC-C2000	2000	1540	1 1/4
ODFC-C2400	2400	1700	1 1/4
ODFC-C2800	2800	1950	1 1/4
ODFC-C3000	3000	2080	1 1/2
ODFC-C3200	3200	2210	1 1/2

Model	Nominal CFM	A (mm)	Pipe Size (in.)
ODFC-C0600	600	650	3/4
ODFC-C0800	800	735	3/4
ODFC C1000	1000	845	3/4
ODFC-C1200	1200	960	1
ODFC-C1400	1400	1070	1
ODFC-C1600	1600	1180	1
ODFC-C1800	1800	1350	1
ODFC-C2000	2000	1510	1 1/4
ODFC-C2400	2400	1675	1 1/4
ODFC-C2800	2800	1925	1 1/4
ODFC-C3000	3000	2050	1 1/2
ODFC-C3200	3200	2180	1 1/2



# Luxury Exposed Fan Coils

## SPECIFICATIONS

### UNIT CONSTRUCTION

These fan coil unit consists of coil, motor/blower assembly Filter, Multi speed switch, connections and a drain pan securely mounted on heavy gauge steel housing.

Access to the blower assembly is provided through the removable cover from where the complete fan/motor deck can be removed for servicing.

### BLOWER ASSEMBLY

The direct drive blower motor assembly is easily accessible for complete servicing after removal of fan deck from the unit. The blower wheels are large in diameter and are of the forward curved design. Constructed of Plastic or Aluminum, they are balanced for quiet and smooth performance.

### MOTORS

Motors are permanent split capacitor type with multi speed tapped windings and thermal protector. The bearings are of sleeve type.





### COILS

Coils are Multi rows deep and are manufactured from 5/8"OD copper tubing with aluminum fins mechanically bonded to the tubing. All coils are factory tested at 300 psig.

### DRAIN PAN

The condensate drain pan is fabricated of heavy gauge galvanized steel. The drain pan could coated by FRP (Fiberglass) or zinc - rich coating ( optional ).

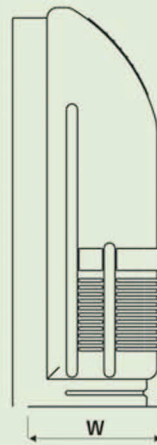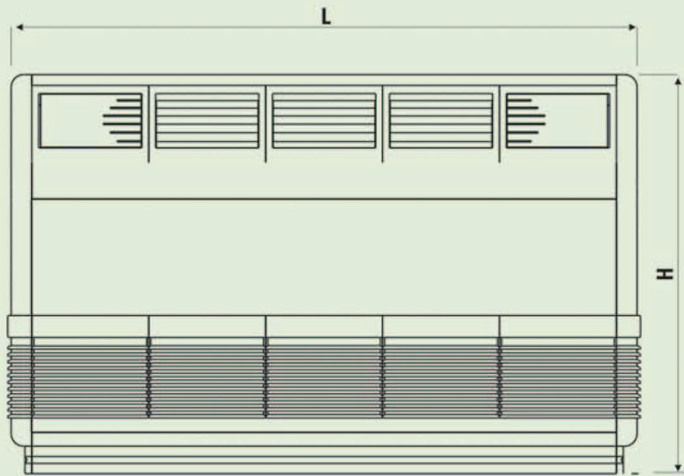

FAN -COILS MODEL	L (mm)	W (mm)	H (mm)	Conn. Size of coil (in.) NPS	ELECTRO MOTOR		Nominal air flow (cfm)
					No. of motor × nominal power(w)	Approximate high speed (rpm)	
OFC-SX-02	955	215	580	3/4"	1 × 30 W	1100	200
OFC-SX-03	1135	215	580	3/4"	1 × 30 W	1100	300
OFC-SX-04	1315	215	580	3/4"	1 × 30 W	1100	400
OFC-SX-06	1495	215	580	3/4"	1 × 30 W	1100	600
OFC-SX-08	1675	215	580	3/4"	2 × 30 W	1100	800
OFC-SX-10	1855	215	580	3/4"	2 × 30 W	1100	1000
OFC-SX-12	2035	215	580	3/4"	2 × 30 W	1100	1200

Subject To Modification without notice



**Patents:**

OMRAN TAHVIEH







**Industrial cooling tower**



**Fiber glass cooling tower - 8 to 1250 tons**



**Trapezoidal and Cubic cooling tower - 15 to 1200 tons**



**Centrifugal cooling tower - 5 to 1400 tons**



**Air cooled and Water cooled liquid chiller - 10 to 490 tons**



**Air cooled and Water cooled packaged unit 3to100 tons**



**Air handling unit - 2400 to 100000 CFM**



**Heat recovery - Heat pipe , Plate and Rotary**



**Condensing unit - 2 To 75 Tons**



**Room and Ducted fan coil - 200 To 2000 CFM**




**Fluid cooler - 5000 To 6000000 BTU/h**



**Heat exchanger - Shell & Tube & Coils**




**Air cooled condenser - 2000 To 2600000 BTU/h**

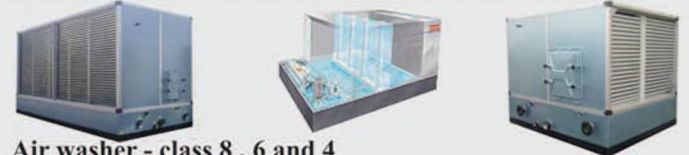

**Air washer - class 8 , 6 and 4**



**Zent 1500 To 30000 CFM**

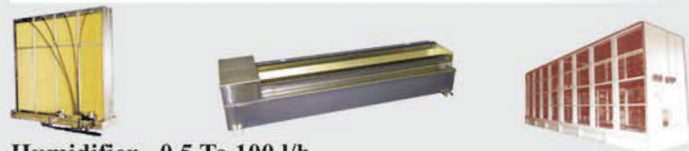

**Humidifier - 0.5 To 100 l/h**



**Fan : centrifugal and axial**



**De Humidifier - Industrial and commercial**



**Evaporative Air Cooler**



**Unit heater - Hot water and steam**




**Air conditioner 6000 To 100000 BTU/h**



**Mini chiller**



**Air curtain - industrial , commercial , residential**

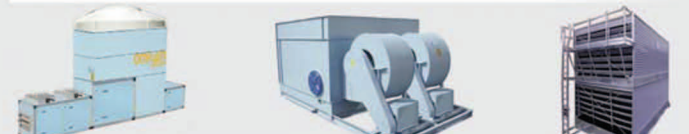

**Special Cooling Towers**





**International Gold Award For Management And Quality And Technology Of Europe Quality Convention 2001 - 2002**  
**Golden Arch of Technology and quality 2003 - Frankfurt**

**شرکت صنعتی عمران تهویه** ( تولید کننده دستگاه های تهویه مطبوع)  
 دفتر شماره ۱ (فروش): تهران - خیابان پاسداران ، بوستان دوم ، خیابان عراقی ، خیابان کشوری ، خیابان ملکی نسب ، خیابان بهاران، بن بست بهار - پلاک: ۴  
 تلفن: ۲۲۳۲۴۳۷۸-۹ ، ۲۲۵۱۴۱۲۹ ، ۲۲۳۲۴۹۶۵-۶ ، ۲۲۳۰۷۲۰۹ ، ۵-۸۸۷۶۹۶۱  
 کارخانه A: شهرک صنعتی پرند، خیابان نوآوران ، تلفاکس: ۳۱ و ۳۳ - ۵۶۴۱۸۴۳۰ - ۷ - ۵۶۴۱۹۳۰۶

**Omran Tahviah Industrial Co.** (Heating, Ventilation and Air Conditioning)

Office 1 (Sales Office): No:4, Bahar Dead End, Baharan Alley, Maleki nasab St, Keshvari St, Araghi St,  
 2nd Boustan, Pasdaran St, Tehran.

Tel & Fax: +98(21) 22324378-9 , 22514129 , 22324965-6 , 22307209 , 88876961-5.

[www.omrantahviah.com](http://www.omrantahviah.com)

E-mail: [info@omrantahviah.com](mailto:info@omrantahviah.com)